

# 1F1 THRU 1F7

## FAST SWITCHING PLASTIC RECTIFIER

VOLTAGE:50 TO 1000V

CURRENT:1.0A




### FEATURE

Molded case feature for auto insertion  
High current capability  
Low leakage current  
High surge capability  
High temperature soldering guaranteed  
250°C10sec/0.375"lead length at 5 lbs tension  
Fast switching for high efficiency

### MECHANICAL DATA

Terminal:Plated axial leads solderable per MIL-STD 202E, method 208C  
Case:Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy  
Polarity:color band denotes cathode  
Mounting position:any

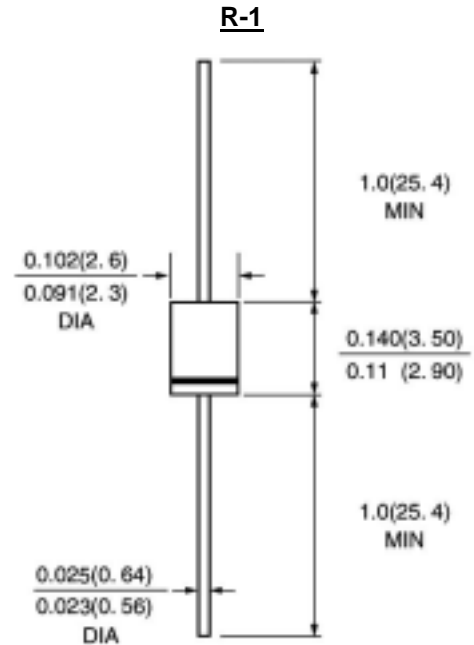

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	1F1	1F2	1F3	1F4	1F5	1F6	1F7	units
Maximum Recurrent Peak Reverse Voltage	V <sub>rrm</sub>	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>rms</sub>	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	V <sub>dc</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current 3/8"lead length at Ta =55°C	I <sub>f(av)</sub>	1.0							A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I <sub>fsm</sub>	30.0							A
Maximum Forward Voltage at rated Forward Current and 25°C	V <sub>f</sub>	1.2							V
Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =100°C	I <sub>r</sub>	5.0 100.0							μA μA
Maximum Reverse Recovery Time (Note 1)	T <sub>rr</sub>	150			250		500		nS
Typical Junction Capacitance (Note 2)	C <sub>j</sub>	10.0							pF
Typical Thermal Resistance (Note 3)	R(ja)	45.0							°C/W
Storage and Operating Junction Temperature	T <sub>stg</sub> ,T <sub>j</sub>	-50 to +150							°C

### Note:

- Reverse Recovery Condition I<sub>f</sub> =0.5A, I<sub>r</sub> =1.0A, I<sub>rr</sub> =0.25A
- Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
- Thermal Resistance from Junction to Ambient at 0.375"lead length, P.C. Board Mounted

RATINGS AND CHARACTERISTIC CURVES 1F1 THRU 1F7

FIG.1- MAXIMUM TYPICAL FORWARD CURRENT DERATING CURVE

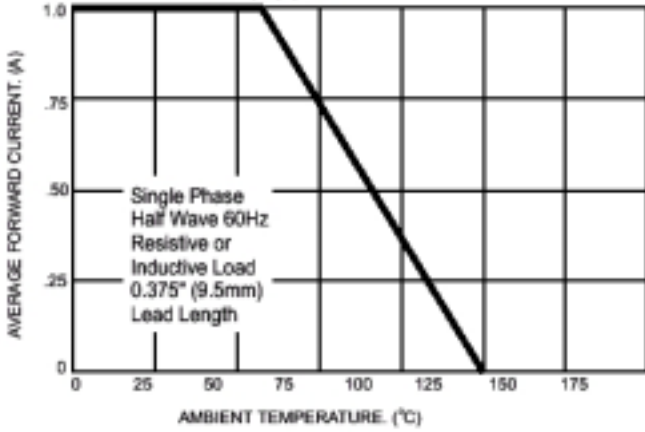


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

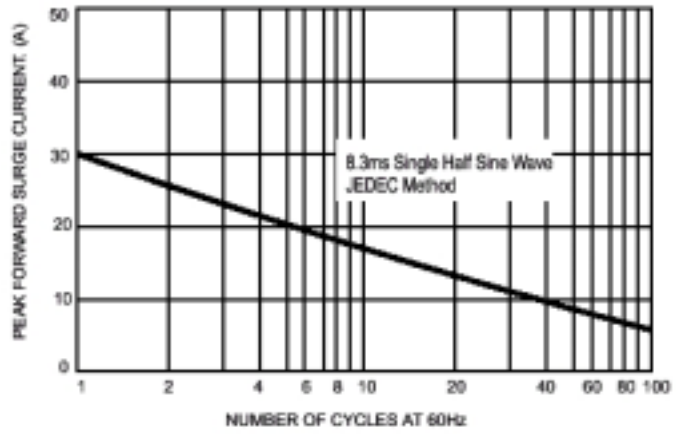


FIG.3- TYPICAL FORWARD CHARACTERISTICS

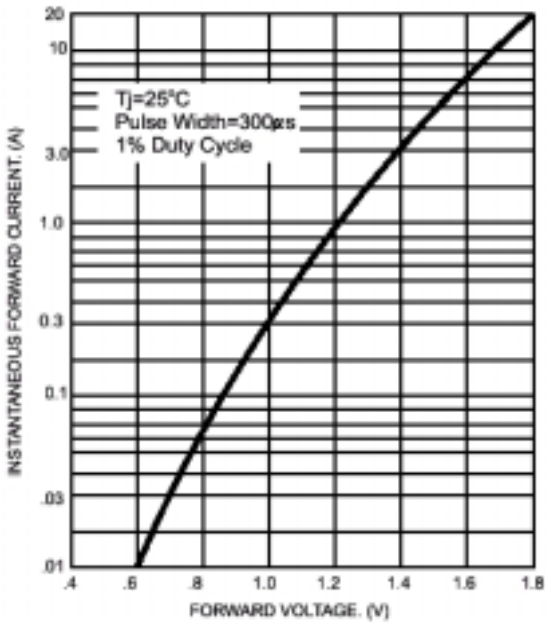


FIG.4- TYPICAL JUNCTION CAPACITANCE

