

31GF6A

**ULTRAFAST EFFICIENT
GLASS PASSIVATED RECTIFIER**
VOLTAGE : 600V CURRENT : 3.0A




FEATURE

Low power loss
High surge capability
Ultra-fast recovery time for high efficiency
High temperature soldering guaranteed
250 /10sec/0.375 lead length at 5 lbs tension

MECHANICAL DATA

Terminal : Plated axial leads solderable per MIL-STD 750, method 2026
Case : Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy
Polarity : color band denotes cathode
Mounting position : any

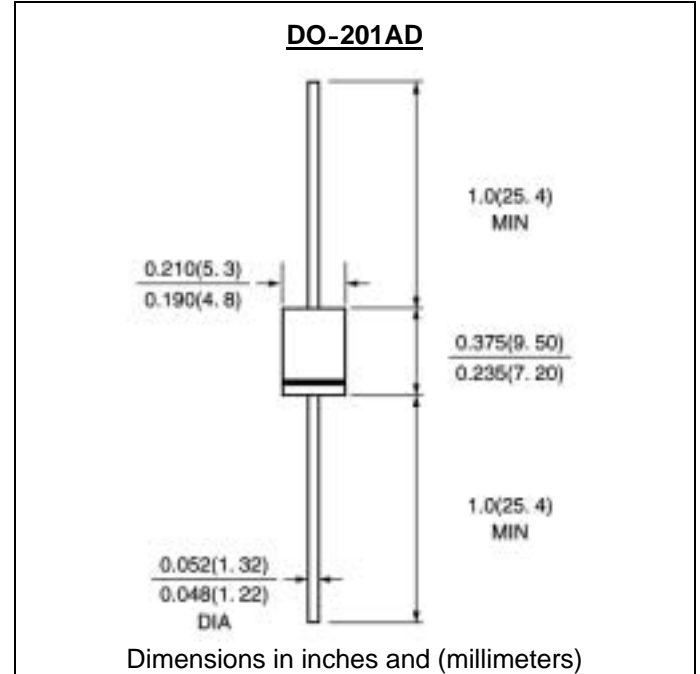

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60HZ, resistive or inductive load rating at 25 °C, unless otherwise stated)

	SYMBOL	31GF6A	units
Maximum Recurrent Peak Reverse Voltage	V _{rrm}	600	V
Maximum RMS Voltage	V _{rms}	420	V
Maximum DC blocking Voltage	V _{dc}	600	V
Maximum Average Forward Rectified Current, 0.375 lead length at TL =110	I _{f(av)}	3.0	A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I _{fsm}	125	A
Maximum Forward Voltage at Forward current At3.0A (Note 1)	V _f	1.6	V
Maximum DC Reverse Current Ta =25 at rated DC blocking voltage Ta =120	I _r	10.0 100.0	μA μA
Maximum Reverse Recovery Time (Note 2)	T _{rr}	30	nS
Typical Thermal Resistance	R(ja)	30.0	/W
Storage and Operating Junction Temperature	T _{stg,Tj}	-40 to +150	

Note :
1. Pulse test:300uS pulse width, 1% duty cycle
2. Reverse Recovery Condition I_f =0.5A, I_r =1.0A, I_{rr} =0.25A

Fig. 1 – Maximum Forward Current Derating Curve

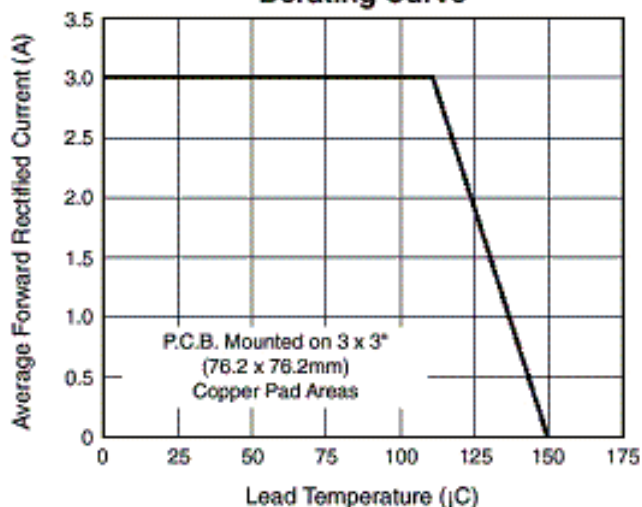


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

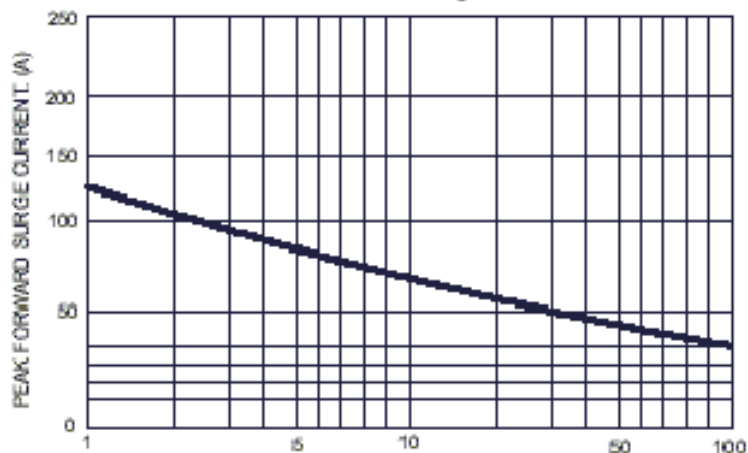


Fig. 3 – Typical Reverse Current

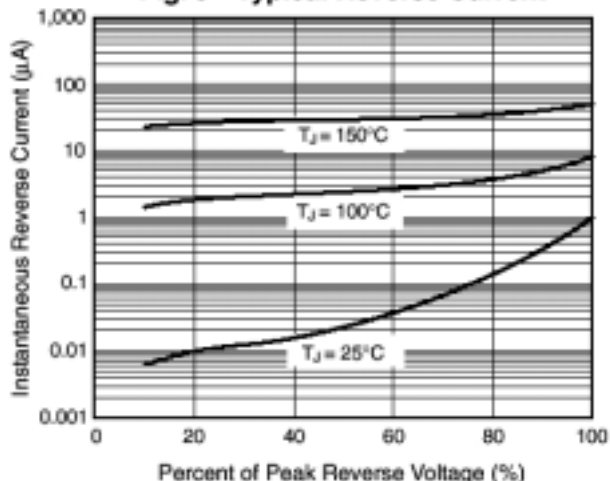


Fig. 4 – Typical Forward Voltyage

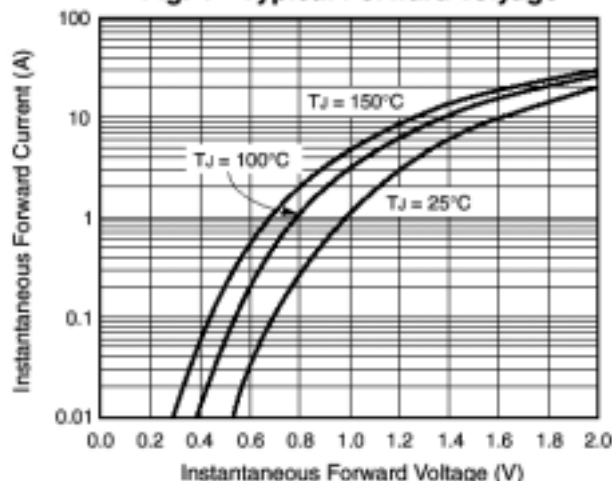


Fig. 5 – Typical Junction Capacitance

