

**BY448**

**SINTERED GLASS JUNCTION  
AVALANCHE RECTIFIER**

**VOLTAGE:1500V**

**CURRENT: 2.0A**




**FEATURE**

Glass passivated  
High maximum operating temperature  
Low leakage current  
Excellent stability

**MECHANICAL DATA**

Case: SOD-57 sintered glass case  
Terminal: Plated axial leads solderable per MIL-STD 750, method 2026  
Polarity: color band denotes cathode end  
Mounting position: any

**SOD-57**

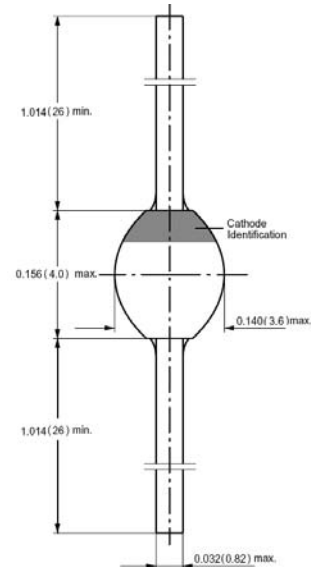

Dimensions in inches and (millimeters)

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	BY448	units
Maximum Repetitive Peak Reverse Voltage	V <sub>rrm</sub>	1500	V
Maximum RMS Voltage	V <sub>rms</sub>	1050	V
Maximum DC blocking Voltage	V <sub>dc</sub>	1500	V
Maximum Average Forward Rectified Current	I <sub>f(av)</sub>	2.0	A
Non-Repetitive Peak Forward Surge Current at tp=10ms half sinewave	I <sub>fsm</sub>	30.0	A
Maximum Instantaneous Forward Voltage at 3.0A	V <sub>f</sub>	1.60	V
Maximum DC Reverse Current Ta =25°C Ta =150°C	I <sub>r</sub>	5.0 150.0	μA
Maximum Reverse Recovery Time (Note 1)	T <sub>rr</sub>	1000	nS
Typical Thermal Resistance (Note 2)	R <sub>th(ja)</sub>	100	K/W
Storage and Operating Junction Temperature	T <sub>stg</sub> , T <sub>j</sub>	-65 to +175	°C

Note:

1. Reverse Recovery Condition I<sub>f</sub> =0.5A, I<sub>r</sub> =1.0A, I<sub>rr</sub> =0.25A
2. on PC with spacing 25mm

RATINGS AND CHARACTERISTIC CURVES BY448

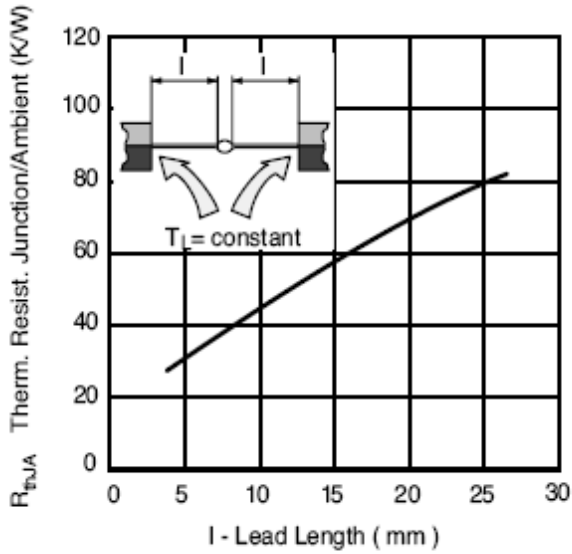


Figure 1. Typ. Thermal Resistance vs. Lead Length

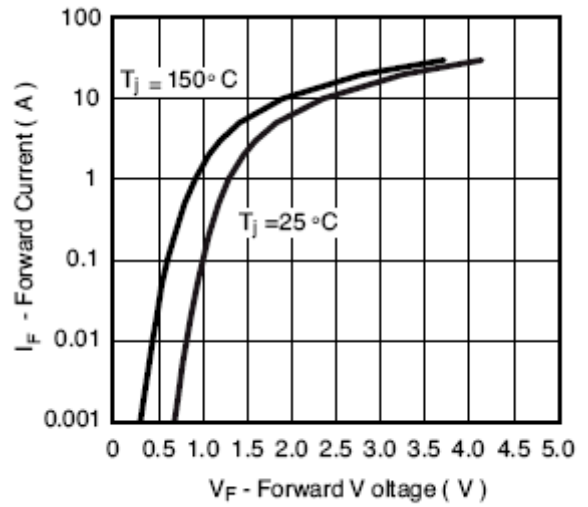


Figure 2. Forward Current vs. Forward Voltage

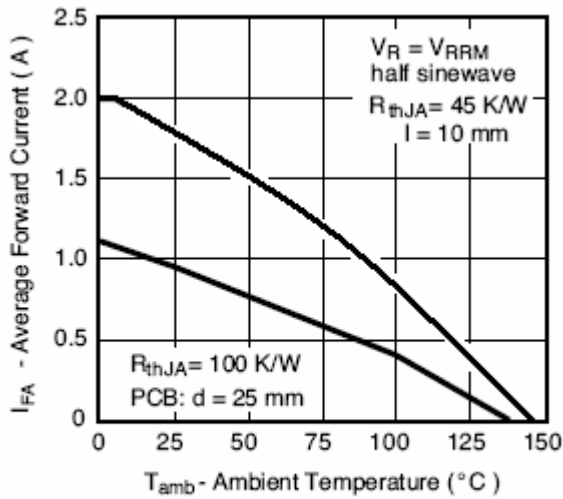


Figure 3. Max. Average Forward Current vs. Ambient Temperature

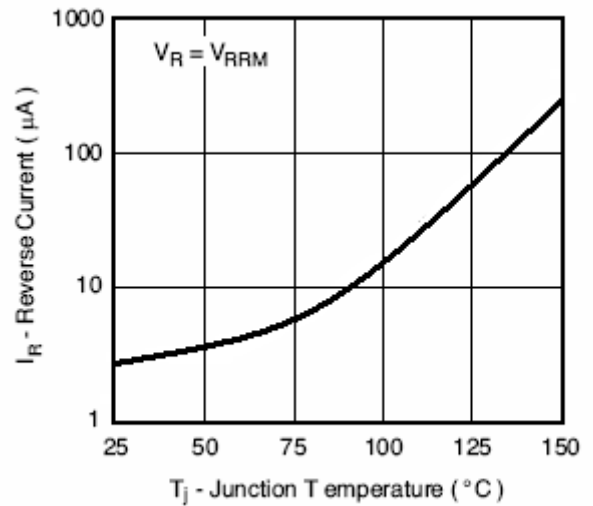


Figure 4. Reverse Current vs. Junction Temperature

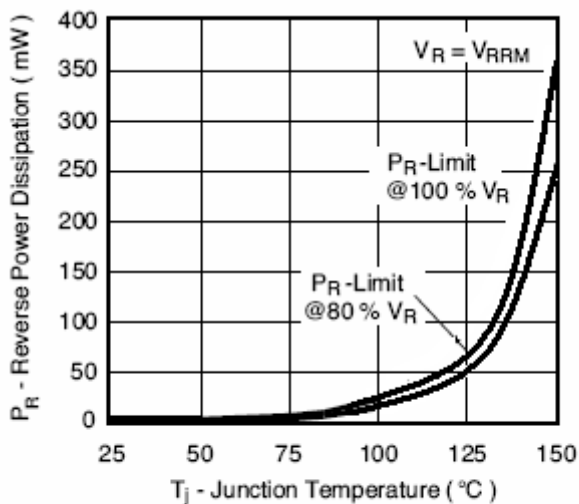


Figure 5. Max. Reverse Power Dissipation vs. Junction Temperature

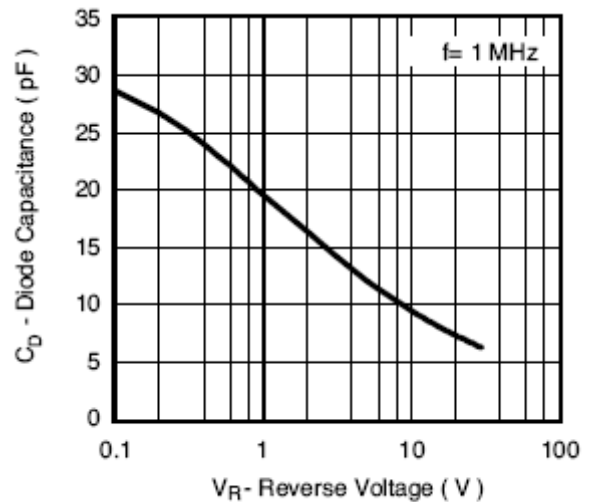


Figure 6. Diode Capacitance vs. Reverse Voltage