

# ES1D-E

## SURFACE MOUNT FAST ULTRAFAST RECTIFIER

VOLTAGE: 200V

CURRENT: 1.0A




### FEATURE

Ideal for surface mount pick and place application  
Low profile package  
Built-in strain relief  
High surge capability  
High temperature soldering guaranteed  
260°C/10sec/at terminals  
Glass passivated chip  
Ultrafast recovery time for high efficiency  
Halogen Free

### MECHANICAL DATA

Terminal: Solder plated, solderable per MIL-STD-750,  
Method 2026  
Case: JEDEC DO-214AC molded plastic body over  
passivated chip  
Polarity: Color band denotes cathode

### SMA / DO-214AC

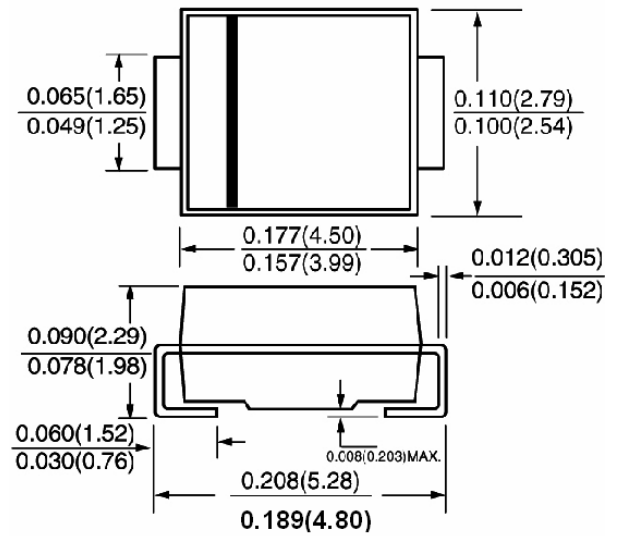

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated,  
for capacitive load, derate current by 20%)


	SYMBOL	ES1D-E	units
Maximum Recurrent Peak Reverse Voltage	V <sub>rrm</sub>	200	V
Maximum RMS Voltage	V <sub>rms</sub>	140	V
Maximum DC blocking Voltage	V <sub>dc</sub>	200	V
Maximum Average Forward Rectified Current 3/8"lead length at T <sub>L</sub> = 110°C	I <sub>f(av)</sub>	1.0	A
Peak Forward Surge Current 8.3ms single half sine- wave superimposed on rated load	I <sub>fsm</sub>	30.0	A
Maximum Forward Voltage at rated forward current	V <sub>f</sub>	0.92	V
Maximum DC Reverse Current at rated DC blocking voltage	I <sub>r</sub>	10.0 100.0	μA
Maximum Reverse Recovery Time (Note 1)	T <sub>rr</sub>	15	nS
Typical Junction Capacitance (Note 2)	C <sub>j</sub>	18.0	pF
Typical Thermal Resistance (Note 3)	R <sub>th(jl)</sub>	30.0	°C/W
Storage and Operating Junction Temperature	T <sub>stg</sub> , T <sub>j</sub>	-50 to +150	°C

Note:


1. Reverse Recovery Condition I<sub>f</sub> = 0.5A, I<sub>r</sub> = 1.0A, I<sub>rr</sub> = 0.25A
2. Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
3. Thermal Resistance from Junction to terminal mounted on 5×5mm copper pad area

## RATINGS AND CHARACTERISTIC CURVES ES1D-E


**FIG. 1 - MAXIMUM FORWARD CURRENT DERATING CURVE**

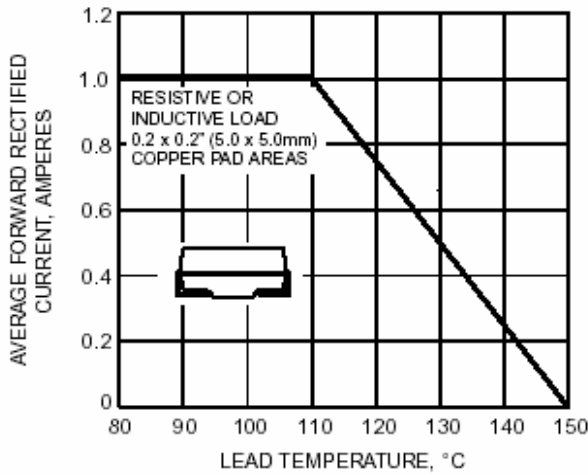


**FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

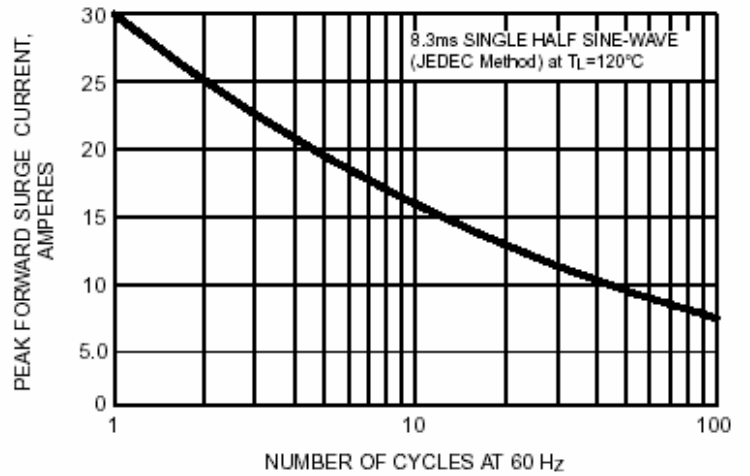


**FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

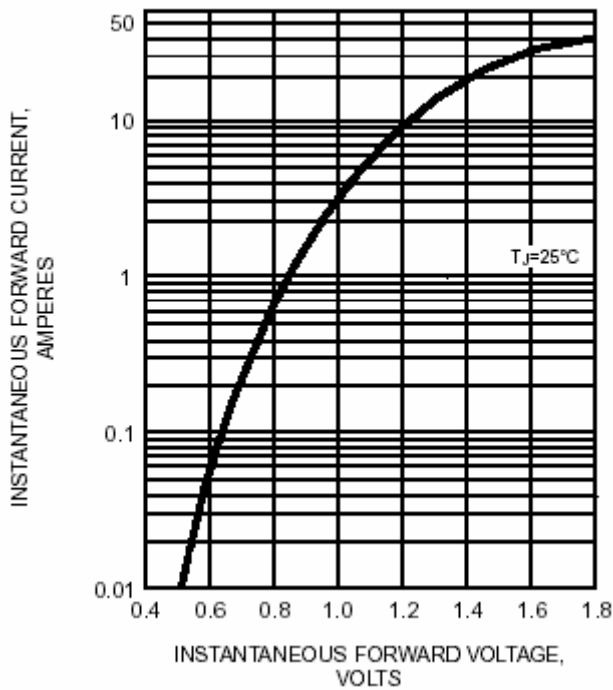

**FIG. 4 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS**

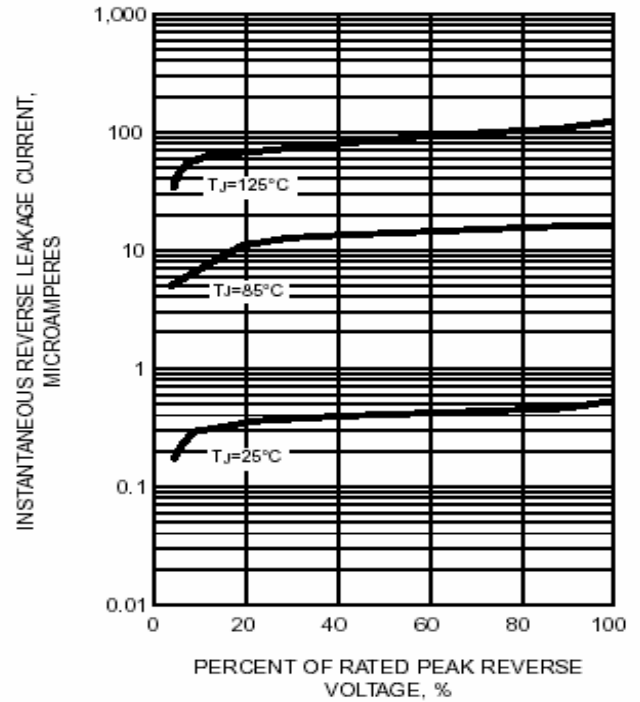

**FIG. 5 - TYPICAL JUNCTION CAPACITANCE**

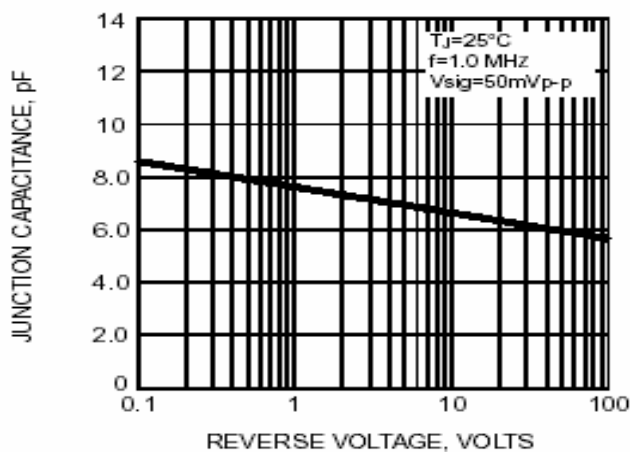

**FIG. 6 - TYPICAL THERMAL IMPEDANCE**

