

# GBU8A-E THRU GBU8M-E

## SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIER

Voltage: 50V to 1000V

Current: 8.0A




### Features

Ideal for printed circuit board  
Glass passivated chip junction  
High case dielectric strength  
High surge overload rating  
This series is UL listed under Recognized Component Index, file number E330278  
Halogen Free

### Mechanical Data

Terminal: Plated leads solderable per J-STD-002  
Case: UL-94 Class V-0 recognized Halogen Free Epoxy  
Polarity: Polarity symbol marked on body  
Mounting position: any

### GBU

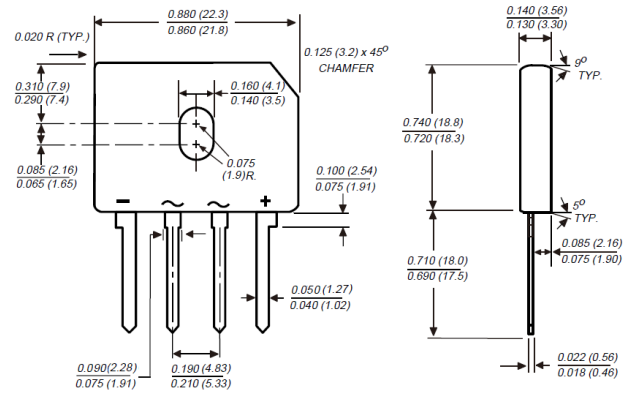

Dimensions in millimeters

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)


	Symbol	GBU 8A- E	GBU 8B- E	GBU 8D- E	GBU 8G- E	GBU 8J- E	GBU 8K- E	GBU 8M- E	units
Maximum repetitive peak reverse voltage	V <sub>rrm</sub>	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V <sub>rms</sub>	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V <sub>dc</sub>	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at T <sub>c</sub> = 100°C (Note 1)	I <sub>f(av)</sub>	8.0							A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	I <sub>fsm</sub>	200							A
Maximum instantaneous forward voltage drop per leg at 8.0A	V <sub>f</sub>	1.0							V
Rating for fusing (t < 8.3ms)	I <sup>2</sup> t	166							A <sup>2</sup> Sec
Maximum DC reverse current at rated DC blocking voltage per leg Ta = 25°C Ta = 125°C	I <sub>r</sub>	5.0 500							μA
Typical junction capacitance per leg at 4V,1MHz	C <sub>j</sub>	211				94			pF
Maximum thermal resistance per leg (Note3)	R <sub>th(ja)</sub> R <sub>th(jc)</sub>	21 2.2							°C/W
Operating junction and storage temperature range	T <sub>j</sub> , T <sub>stg</sub>	-55 to +150							°C

Note:


1. Unit case mounted on 3.2 x 3.2 x 0.12" thick (8.2 x 8.2 x 0.3cm) Al. Plate heatsink
2. Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw
3. Units mounted in free air, no heatsink on P.C.B. with 0.5 x 0.5" (12 x 12mm) copper pads, 0.375" (9.5mm) lead length

# RATINGS AND CHARACTERISTIC CURVES GBU8A-E THRU GBU8M-E


**Fig. 1 – Derating Curve Output Rectified Current**

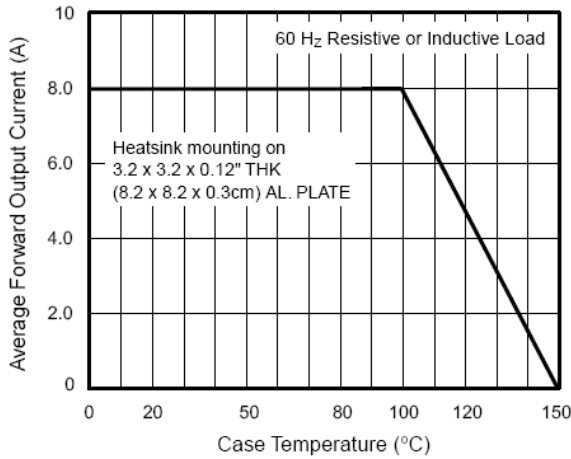


**Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current Per Leg**

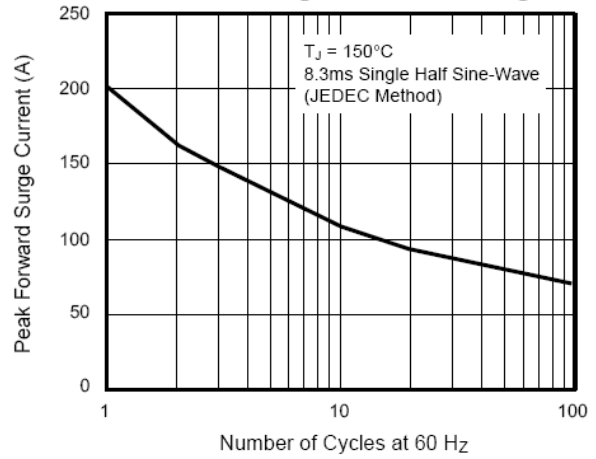


**Fig. 3 – Typical Forward Characteristics Per Leg**

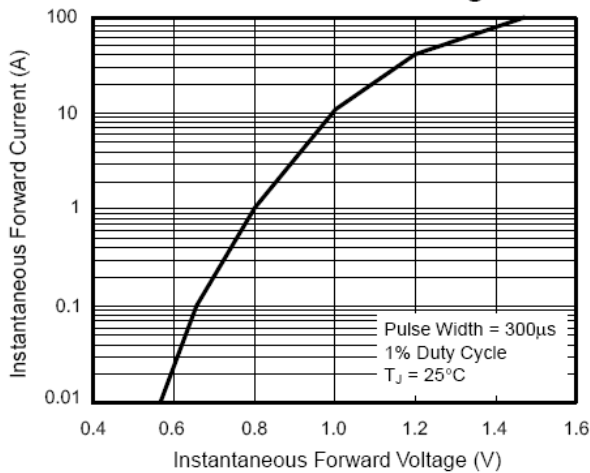

**Fig. 4 – Typical Reverse Characteristics Per Leg**

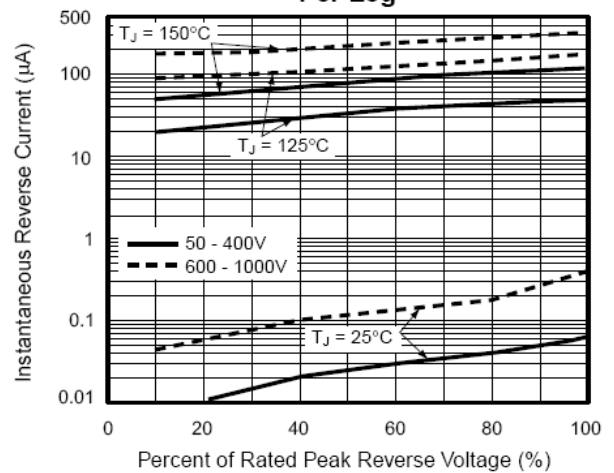

**Fig. 5 – Typical Junction Capacitance Per Leg**

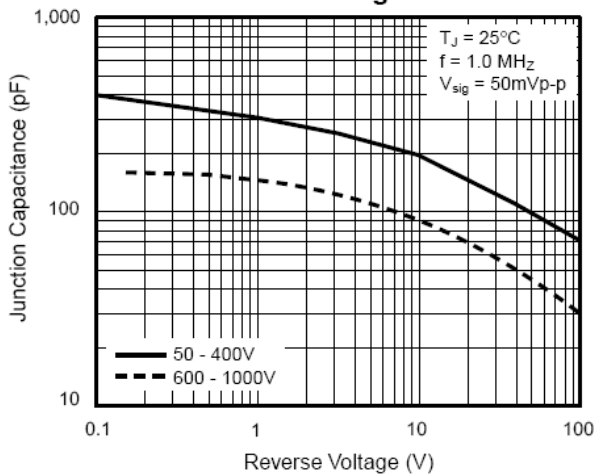

**Fig. 6 – Typical Transient Thermal Impedance Per Leg**

