

# GL1510-E

**SINGLE PHASE GLASS PASSIVATED  
SURFACE MOUNT FLAT BRIDGE RECTIFIER**  
VOLTAGE: 1000V                      CURRENT: 1.5A




## FEATURE

- Ideal for printed circuit board
- Glass passivated chip
- Reliable low cost construction utilizing molded plastic technique
- High surge current capability
- Small size, simple installation
- High temperature soldering guaranteed: 260°C/10 seconds
- Halogen Free

## MECHANICAL DATA

- Terminal: Plated leads solderable per J-STD-002
- Case: UL-94 Class V-0 recognized Halogen Free Epoxy
- Polarity: Polarity symbol marked on body

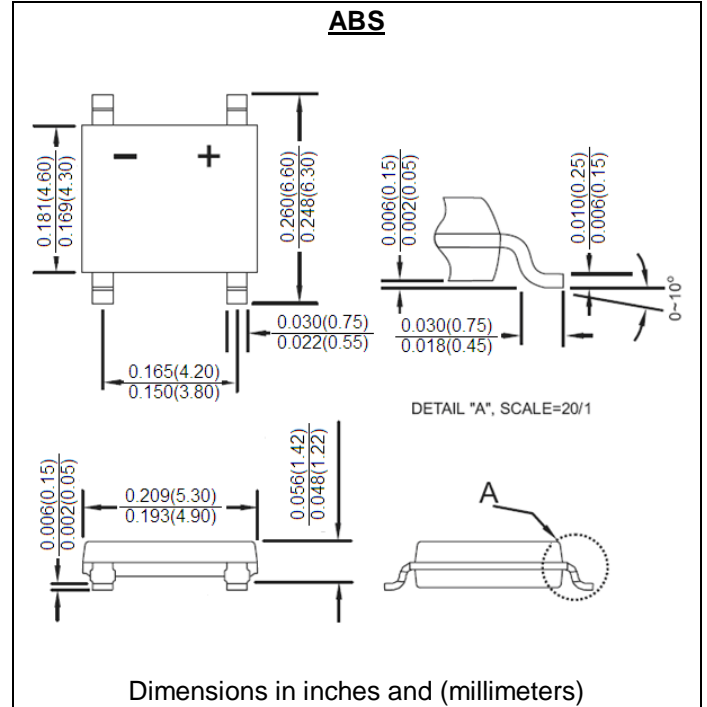


## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)


|   | Symbol                            | GL1510-E    | units              |
|---|-----------------------------------|-------------|--------------------|
| Maximum Recurrent Peak Reverse Voltage  | V <sub>rrm</sub>                  | 1000        | V                  |
| Maximum RMS Voltage   | V <sub>rms</sub>                  | 700         | V                  |
| Maximum DC blocking Voltage   | V <sub>DC</sub>                   | 1000        | V                  |
| Maximum average forward rectified output current                                  | I <sub>f(av)</sub>                | 1.5         | A                  |
| Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load | I <sub>fsm</sub>                  | 50          | A                  |
| Rating for fusing(t<8.3ms)  | I <sup>2</sup> t                  | 10.65       | A <sup>2</sup> sec |
| Maximum Instantaneous Forward Voltage at forward current 1.0A                     | V <sub>f</sub>                    | 1.0         | V                  |
| Maximum DC Reverse Current  | I <sub>r</sub>                    | 5.0         | μA                 |
| at rated DC blocking voltage  |                                   | 100.0       |                    |
| Typical Thermal resistance Junction to case                                       | R <sub>th(jc)</sub>               | 13          | °C/W               |
| Storage and Operating Junction Temperature Range                                  | T <sub>stg</sub> , T <sub>j</sub> | -55 to +150 | °C                 |

Note:


**Fig. 1 - Derating Curve Output Rectified Current**

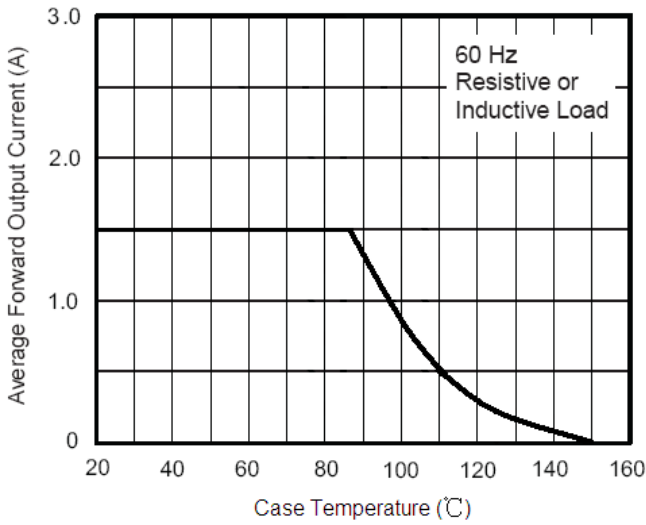


**Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current Per Leg**

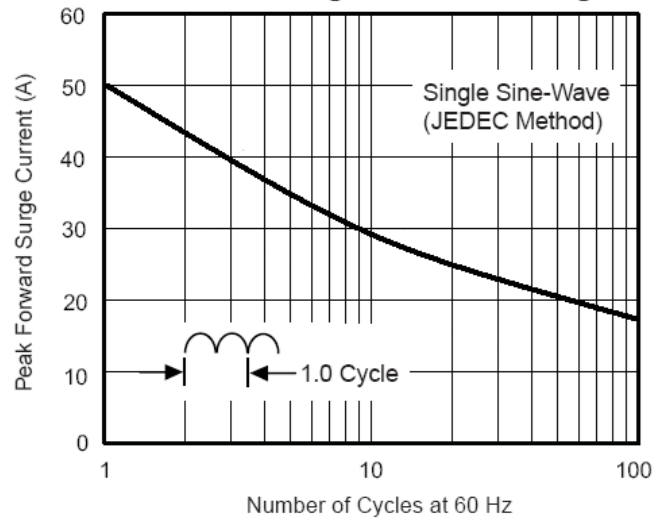

**Fig. 3 - Typical Forward Characteristics Per Leg**

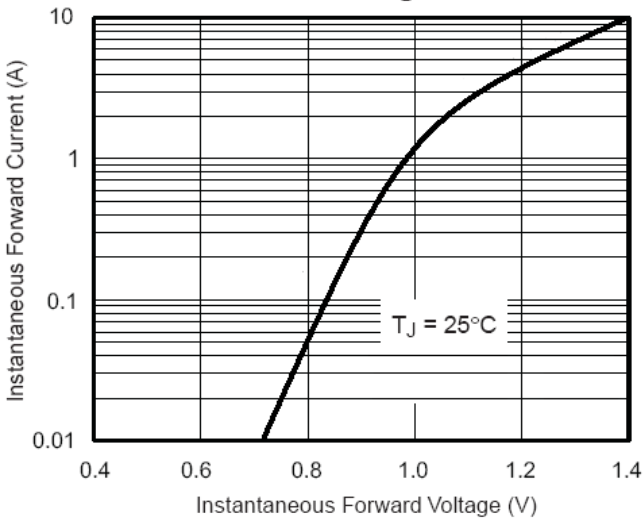

**Fig. 4 - Typical Reverse Leakage Characteristics Per Leg**

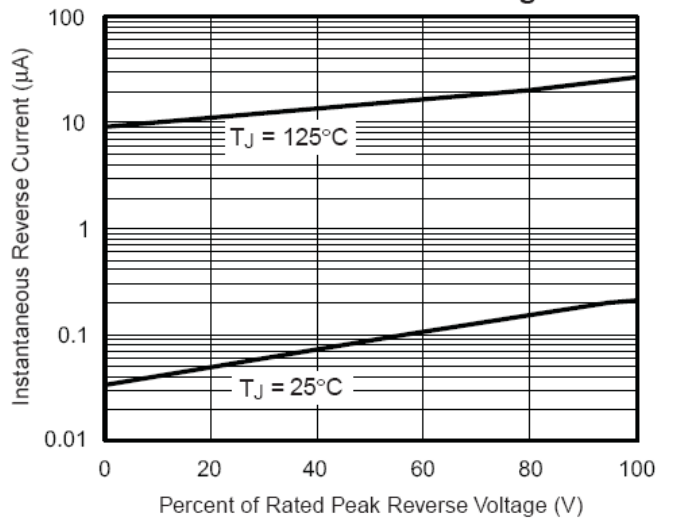

**Fig. 5 - Typical Junction Capacitance Per Leg**

