

# GS5J-K

## SURFACE MOUNT GLASS PASSIVATED RECTIFIER

VOLTAGE: 600V

CURRENT: 5.0A




### FEATURE

Ideal for surface mount pick and place application  
Low profile package  
Built-in strain relief  
High surge capability  
High temperature soldering guaranteed  
260°C/10sec/at terminals

### MECHANICAL DATA

Terminal: Plated leads solderable per J-STD-002  
Case: Molded with UL-94 class V-0 recognized Flame Retardant Epoxy  
Polarity: color band denotes cathode  
Marking: GS5J

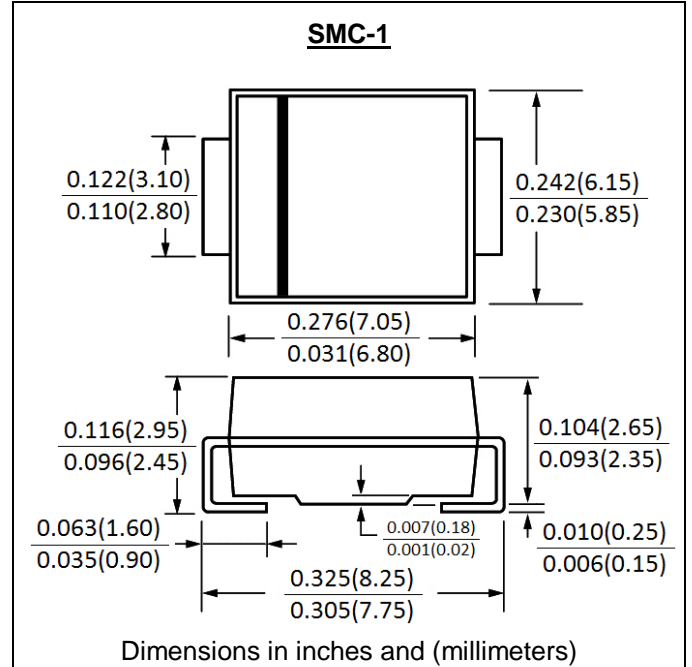

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	Symbol	GS5J-K	units
Maximum Recurrent Peak Reverse Voltage	V <sub>rrm</sub>	600	V
Maximum RMS Voltage	V <sub>rms</sub>	420	V
Maximum DC blocking Voltage	V <sub>dc</sub>	600	V
Maximum Average Forward Rectified Current 3/8" lead length at T <sub>L</sub> = 75°C	I <sub>f(av)</sub>	5.0	A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I <sub>fsm</sub>	100	A
Maximum Forward Voltage at rated Forward current	V <sub>f</sub>	1.15	V
Maximum DC Reverse Current at rated DC blocking voltage	I <sub>r</sub>	10 250	μA
Typical Junction Capacitance (Note 1)	C <sub>j</sub>	40	pF
Typical Thermal Resistance (Note 2)	R <sub>th(jl)</sub>	10	°C/W
Storage and Operating Temperature Range	T <sub>j</sub> , T <sub>stg</sub>	-50 to +150	°C


Note:

1. Measured at 1.0 MHz and applied voltage of 4.0Vdc
2. Thermal Resistance from Junction to terminal mounted on 8×8mm copper pad area


**Fig. 1 - Forward Current Derating Curve**

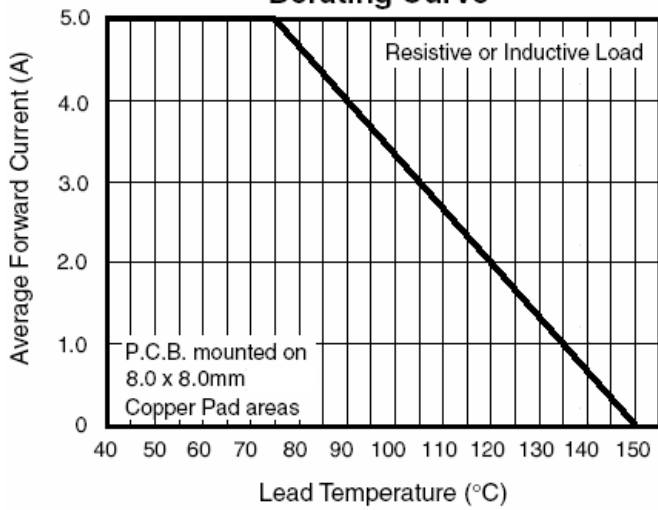


**Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current**

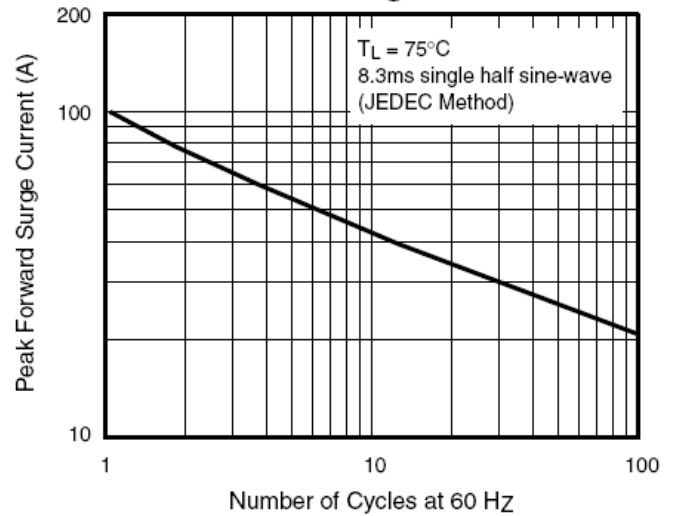

**Fig. 3 - Typical Instantaneous Forward Characteristics**

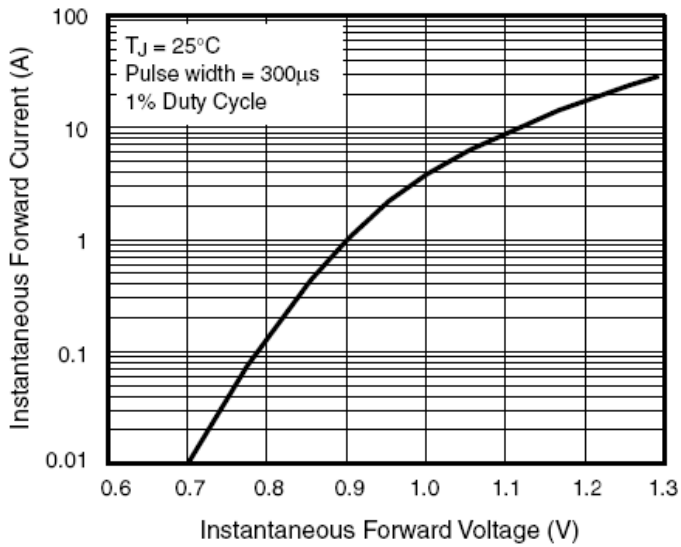

**Fig. 4 - Typical Reverse Characteristics**

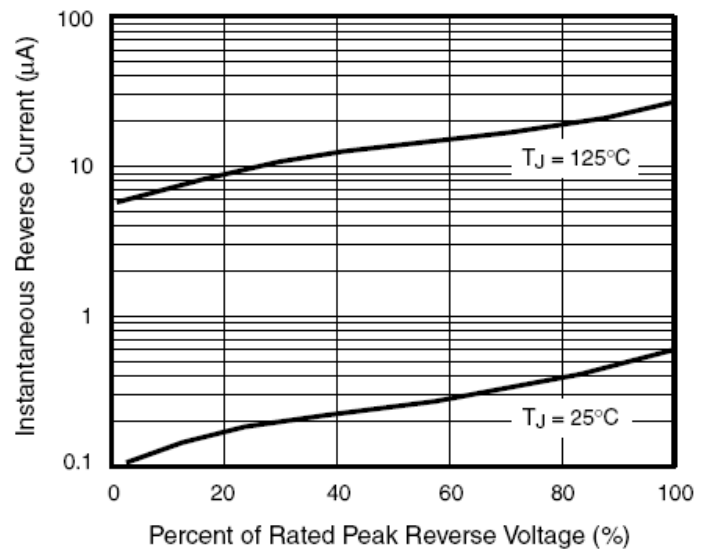

**Fig. 5 - Typical Junction Capacitance**

