

# KB6S

**SINGLE PHASE GLASS PASSIVATED  
SURFACE MOUNT FLAT BRIDGE RECTIFIER**  
VOLTAGE: 600V                      CURRENT: 0.8A




## FEATURE

Ideal for printed circuit board  
Glass passivated chip  
Reliable low cost construction utilizing molded plastic technique  
Small size, simple installation  
High temperature soldering guaranteed: 260°C/10 seconds

## MECHANICAL DATA

Terminal: Plated leads solderable per J-STD-002  
Case:UL-94 Class V-0 recognized Flame Retardant Epoxy  
Polarity: Polarity symbol marked on body  
Marking: KB6S

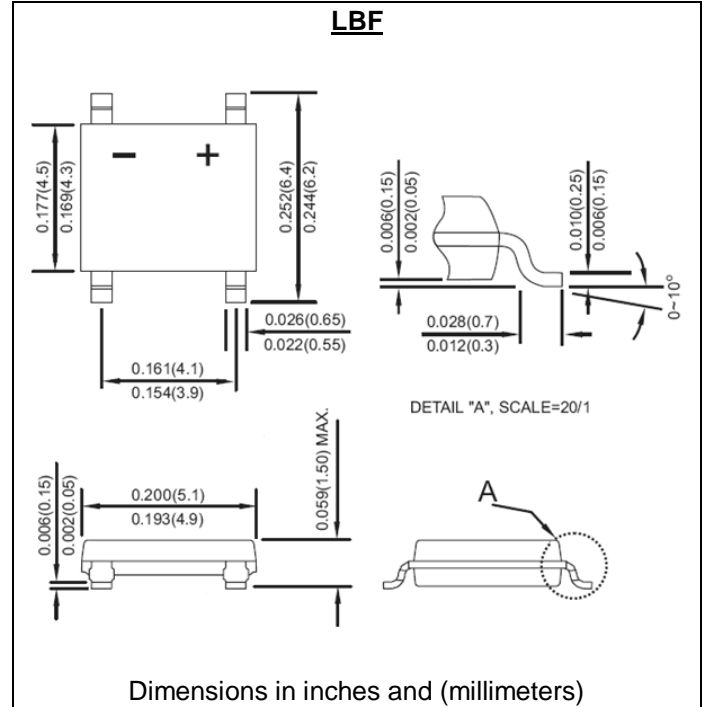

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60Hz, resistive or inductive load rating at 25°C, unless otherwise stated)

|   | Symbol                                     | KB6S         | Units |
|---|--|--------------|-------|
| Maximum Recurrent Peak Reverse Voltage  | V <sub>rrm</sub>                           | 600          | V     |
| Maximum RMS Voltage   | V <sub>rms</sub>                           | 420          | V     |
| Maximum DC blocking Voltage   | V <sub>DC</sub>                            | 600          | V     |
| Maximum Average Forward Rectified Current<br>on glass-epoxy P.C.B.  | I <sub>f(av)</sub>                         | 0.8          | A     |
| Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load                                       | I <sub>fsm</sub>                           | 30           | A     |
| Maximum Instantaneous Forward Voltage at Forward Current 0.4A   | V <sub>f</sub>                             | 0.95         | V     |
| Maximum DC Reverse Current                      Ta =25°C<br>at rated DC blocking voltage                      Ta =110°C | I <sub>r</sub>                             | 5.0<br>100.0 | μA    |
| Typical Thermal resistance                      junction to lead<br>on glass-epoxy P.C.B.                               | R <sub>th(jl)</sub><br>R <sub>th(ja)</sub> | 42<br>88     | °C/W  |
| Storage and Operating Junction Temperature Range  | T <sub>stg, Tj</sub>                       | -55 to +150  | °C    |

Note:

## RATINGS AND CHARACTERISTIC CURVES KB6S

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

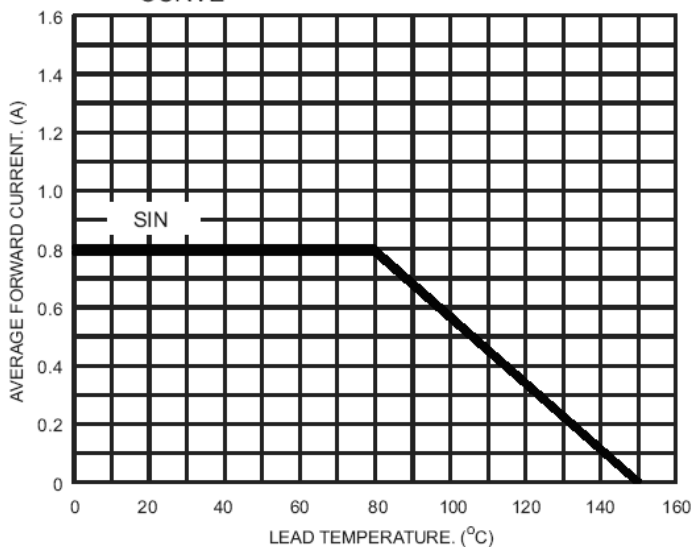


FIG.2- TYPICAL FORWARD CHARACTERISTICS

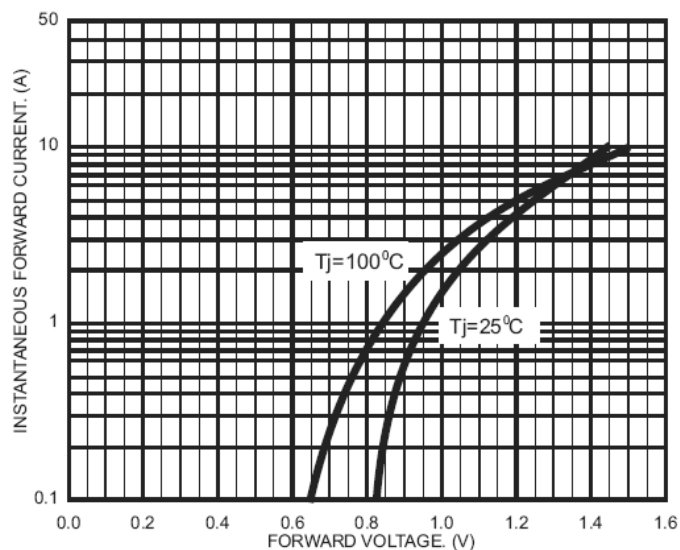


FIG.3- MAXIMUM FORWARD CURRENT DERATING CURVE

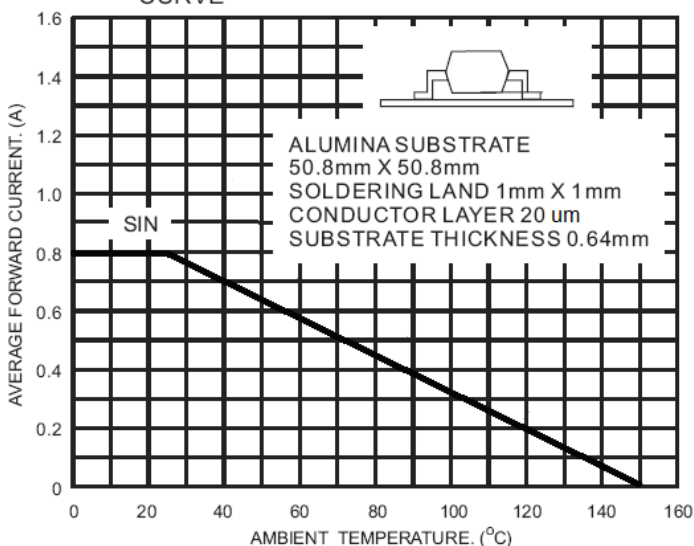


FIG.4- FORWARD POWER DISSIPATION

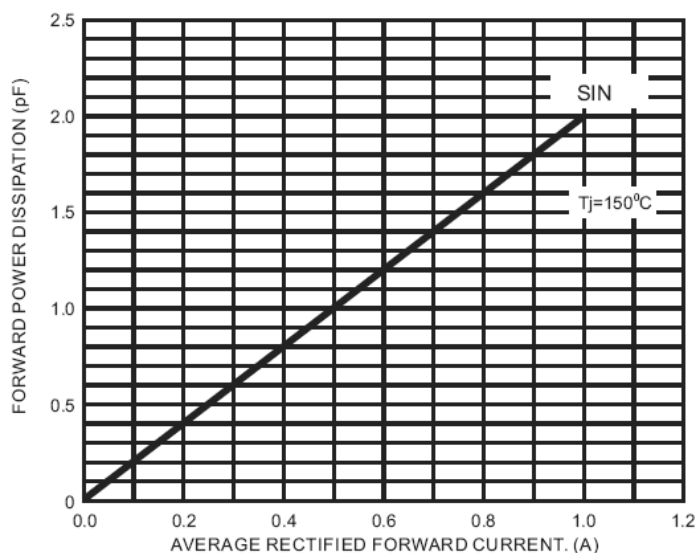


FIG.5- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

