

LLB158-E THRU LLB1510-E

**SINGLE PHASE GLASS PASSIVATED
SURFACE MOUNT FLAT BRIDGE RECTIFIER**
VOLTAGE: 800 to 1000V **CURRENT: 1.5A**




FEATURE

Ideal for printed circuit board
 Glass passivated chip
 Reliable low cost construction utilizing molded plastic technique
 High surge current capability
 Small size, simple installation
 High temperature soldering guaranteed: 260°C/10 seconds
 Halogen Free

MECHANICAL DATA

Terminal: Plated leads solderable per J-STD-002
 Case: UL-94 Class V-0 recognized Halogen Free Epoxy
 Polarity: Polarity symbol marked on body

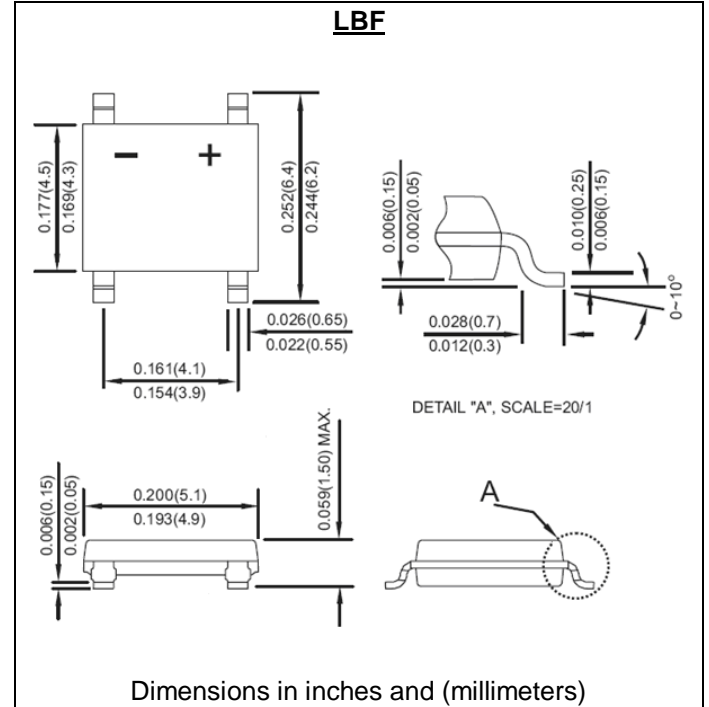

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

| | Symbol | LLB158-E | LLB1510-E | units |
|---|-----------------------------------|-----------------------|-----------|--------------------|
| Maximum Recurrent Peak Reverse Voltage | V _{rrm} | 800 | 1000 | V |
| Maximum RMS Voltage | V _{rms} | 560 | 700 | V |
| Maximum DC blocking Voltage | V _{DC} | 800 | 1000 | V |
| Maximum average forward rectified output current | I _{f(av)} | 1.5 | | A |
| Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load | I _{fsm} | 40 | | A |
| Rating for fusing(t<8.3ms) | I ² t | 6.9 | | A ² sec |
| Maximum Instantaneous Forward Voltage at forward current 0.75A | V _f | 1.0 | | V |
| Maximum DC Reverse Current | I _r | T _a =25°C | 5.0 | μA |
| at rated DC blocking voltage | | T _a =125°C | 100.0 | |
| Typical Thermal resistance Junction to case | R _{th(jc)} | 15 | | °C/W |
| Storage and Operating Junction Temperature Range | T _{stg} , T _j | -55 to +150 | | °C |

Note:

Fig. 1 - Derating Curve Output Rectified Current

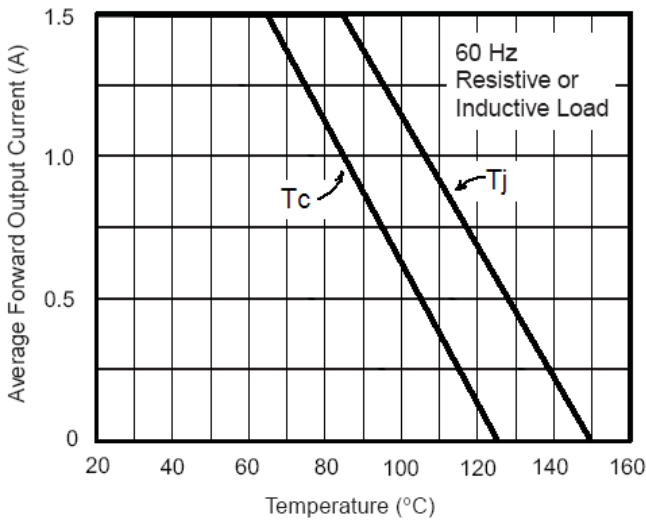


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current Per Leg

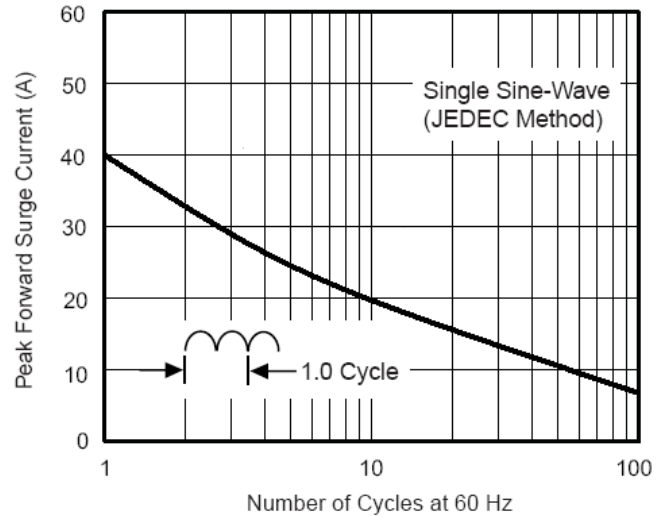


Fig. 3 - Typical Forward Characteristics Per Leg

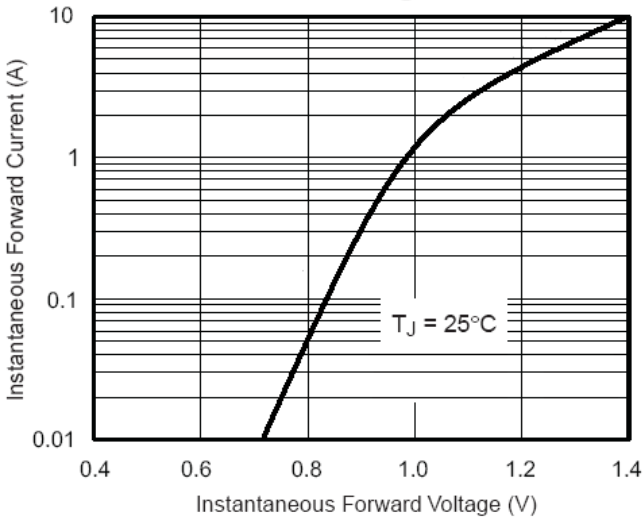


Fig. 4 - Typical Reverse Leakage Characteristics Per Leg

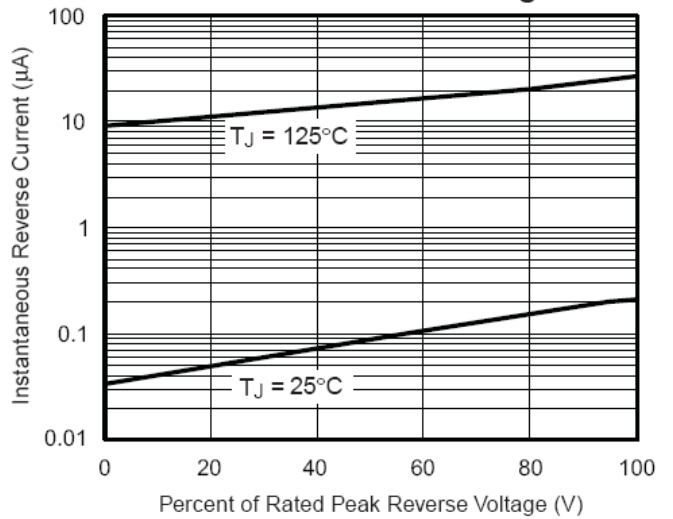


Fig. 5 - Typical Junction Capacitance Per Leg

