

# LLD06-41C

**SINGLE PHASE GLASS PASSIVATED  
SURFACE MOUNT FLAT BRIDGE RECTIFIER  
VOLTAGE: 600V                      CURRENT: 0.8A**




## FEATURE

- Low profile space
- Ideal for automated placement
- Glass passivated chip
- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High temperature soldering: 260°C/10 seconds

## MECHANICAL DATA

- Terminal: Plated leads solderable per J-STD-002
- Case: UL-94 Class V-0 recognized Flame Retardant Epoxy
- Polarity: Polarity symbol marked on body

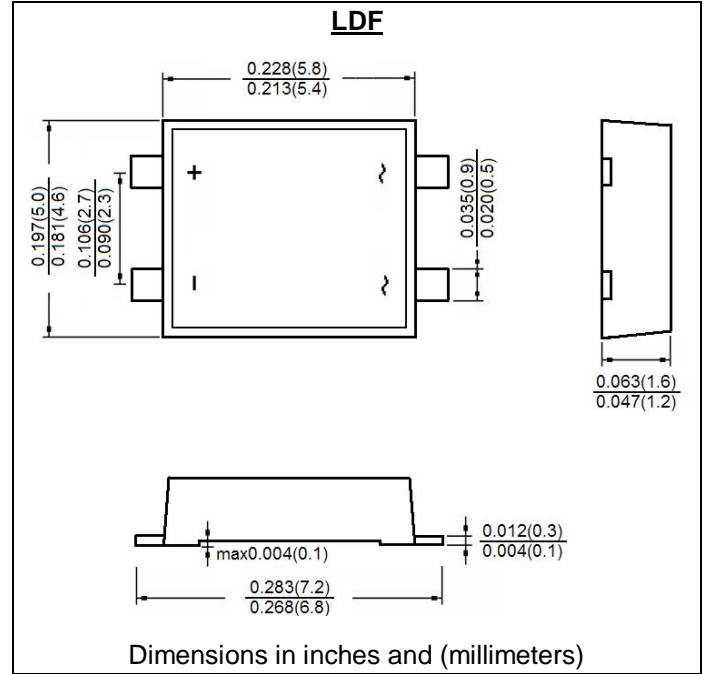


## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)


	SYMBOL	LLD06-41C	Units
Maximum Recurrent Peak Reverse Voltage	V <sub>rrm</sub>	600	V
Maximum RMS Voltage	V <sub>rms</sub>	420	V
Maximum DC blocking Voltage	V <sub>DC</sub>	600	V
Maximum Average Forward Rectified Current at T <sub>a</sub> =40°C	I <sub>f(av)</sub>	0.8	A
Peak Forward Surge Current single half sine-wave superimposed on rated load	I <sub>fsm</sub>	40 @8.3ms 80 @1ms	A
Maximum Instantaneous Forward Voltage at forward current 0.4A	V <sub>f</sub>	1.0	V
Maximum DC Reverse Current at V <sub>DC</sub> =325V and T <sub>c</sub> =25°C	I <sub>r</sub>	1.0	µA
Maximum DC Reverse Current at rated DC blocking voltage	I <sub>r</sub>	5.0 100.0	µA
Total power dissipation (Note1)	P <sub>tot</sub>	1.28	W
Typical Thermal resistance (Note2)	R <sub>th(ja)</sub> R <sub>th(jc)</sub> R <sub>th(jl)</sub>	70 45 20	°C/W
Typical Junction Capacitance (Note3)	C <sub>j</sub>	15.0	pF
Storage and Operating Junction Temperature Range	T <sub>stg</sub> , T <sub>j</sub>	-55 to +150	°C

- Note:
- T<sub>c</sub>=25°C (according to calculations)
  - On aluminum substrate P.C.B. with an area of 0.8"×0.8"(20×20mm) mounted on 0.05×0.05"(1.3×1.3mm) solder pad
  - Measured at 1.0 MHz and applied voltage of 4.0 volt


**Fig.1 Derating Curve For Output Rectified Current**

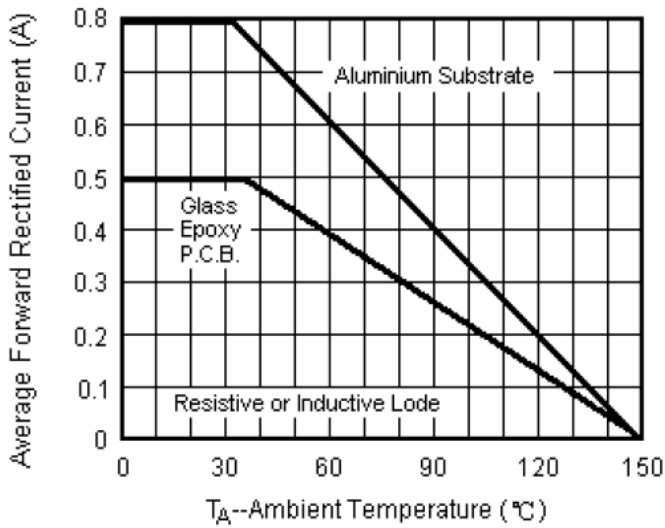


**Fig.2 Maximum Non-Repetitive Peak Forward Surge Current Per Leg**

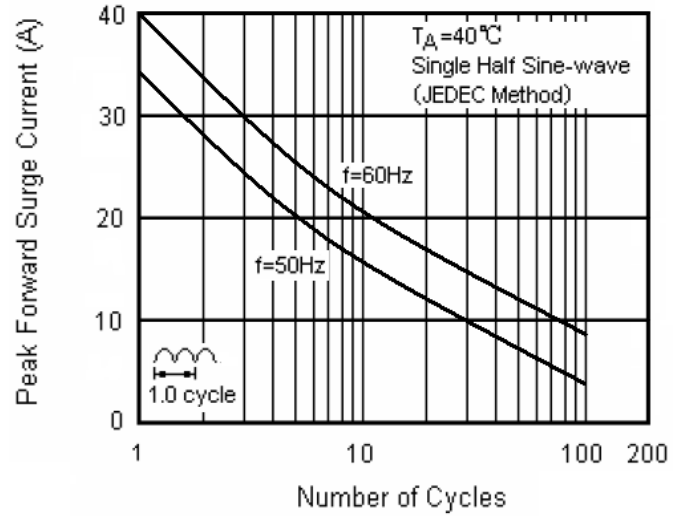


**Fig.3 Typical Forward Voltage Characteristics Per Leg**

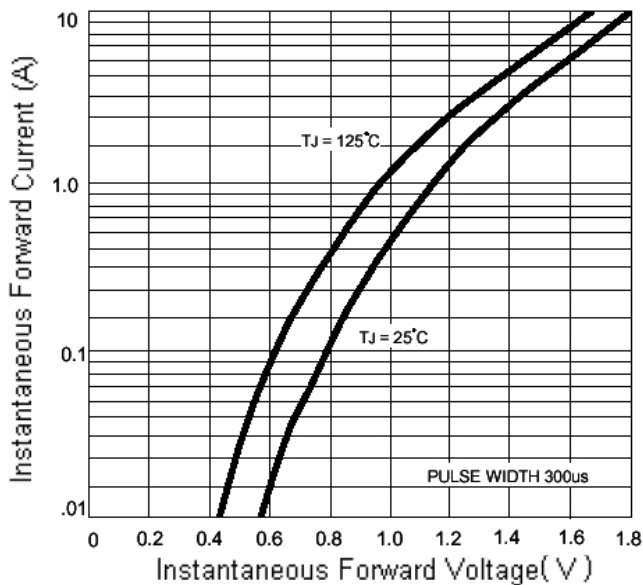

**Fig.4 Typical Reverse Leakage Characteristics Per Leg**

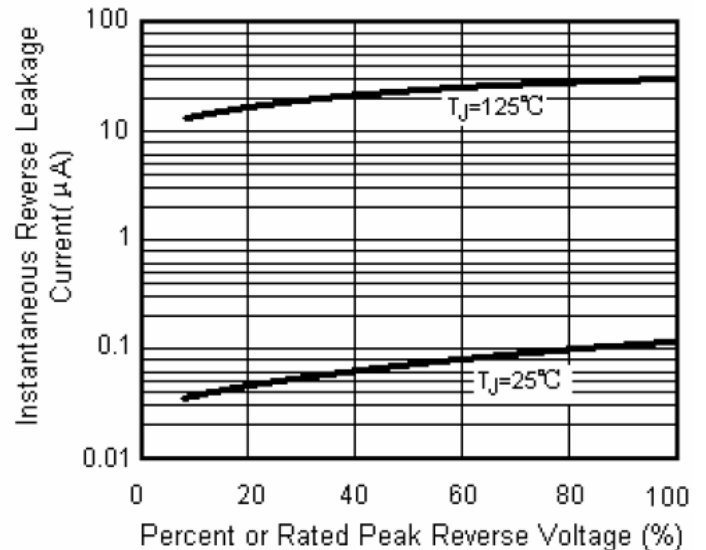

**Fig.5 Typical Junction Capacitance Per Leg**

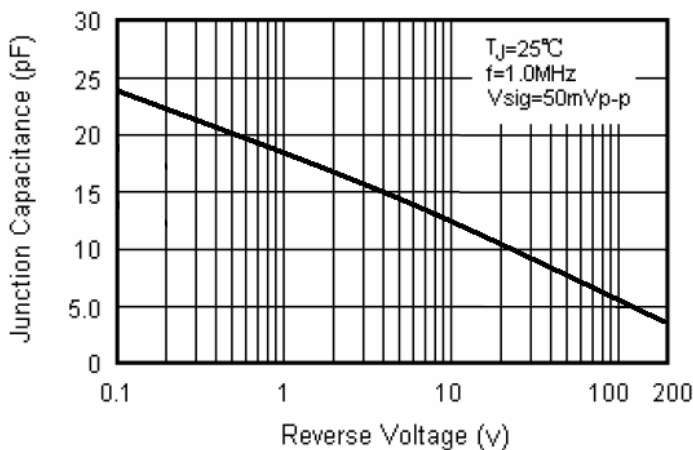

1. According to 1.4601.442-01 test circuit, ESD Test of LLD06 at 600 Vdc passed with the immunity capability of  $\pm 5\text{KV}$

2. Description of test method & conditions

Setup:

Test voltages for DUT: max specified DC blocking voltage.

ESD test level for Contact discharge:

10 Impulses at each test level and output polarity.

Test level:  $\pm 1, \pm 2, \pm 3, \pm 4, \pm 5\text{KV}$

Test criteria: No faults are allowed.

Ambient temperature:  $25^\circ\text{C}$  Relative humidity : 55%

Specification: ESD Generator according to IEC 61000-4-2

Test circuit:

