

# MUR460-E

## GLASS PASSIVATED JUNCTION Ultra fast Plastic Rectifiers

VOLTAGE: 600V

CURRENT: 4.0A




### FEATURE

Plastic package has Underwriters Laboratories Flammability Classification 94V-0  
Ideally suited for use in very high frequency switching power supplies, inverters and as free wheeling diodes  
Ultra fast recovery time for high efficiency  
Excellent high temperature switching  
Glass passivated junction  
High temperature soldering guaranteed:  
250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension  
Halogen Free

### MECHANICAL DATA

Case: JEDEC DO-201AD molded plastic body over passivated chip  
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026  
Polarity: Color band denotes cathode end  
Mounting Position: Any  
Weight: 0.045 oz., 1.2 g

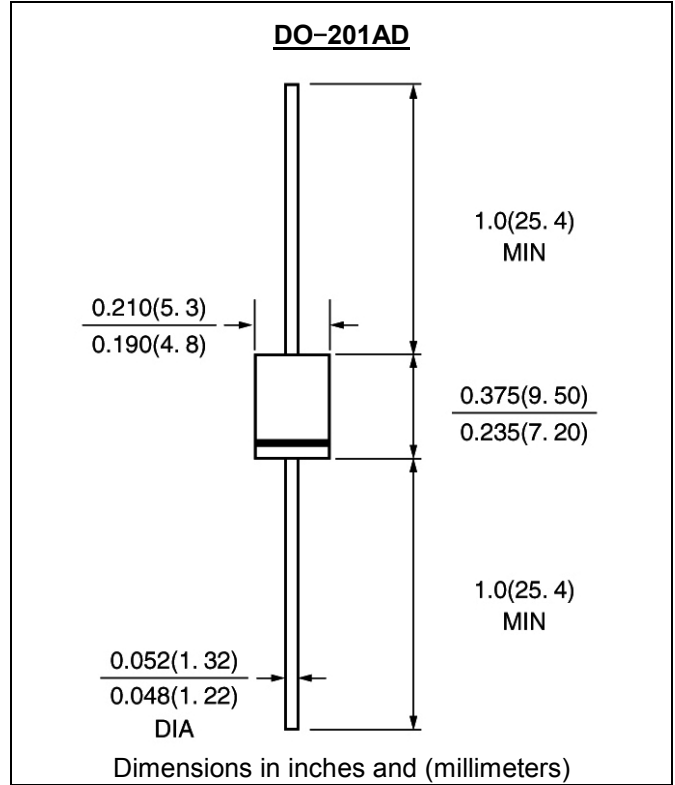

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	MUR460-E	units
Maximum Recurrent Peak Reverse Voltage	V <sub>rrm</sub>	600	V
Maximum RMS Voltage	V <sub>rms</sub>	420	V
Maximum DC blocking Voltage	V <sub>dc</sub>	600	V
Maximum Average Forward Rectified	I <sub>f(av)</sub>	4.0	A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I <sub>fsm</sub>	150	A
Maximum Forward Voltage at rated Forward Current and 25°C	V <sub>f</sub>	1.28	V
Maximum Reverse Recovery Time (Note 1)	T <sub>rr</sub>	45	nS
Typical thermal resistance junction to ambient (Note 2)	R <sub>th(ja)</sub>	28	°C/W
Maximum DC Reverse Current at rated DC blocking voltage	I <sub>r</sub>	10 100	μA
Storage and Operating Temperature Range	T <sub>stg</sub> , T <sub>j</sub>	-55 to +150	°C

Note:

- Reverse Recovery Condition I<sub>f</sub> = 0.5A, I<sub>r</sub> = 1.0A, I<sub>rr</sub> = 0.25A
- Lead length = 1/2" on P.C. board with 1.5" x 1.5" copper surface

RATINGS AND CHARACTERISTIC CURVES MUR460-E

Fig. 1 – Forward Current Derating Curve

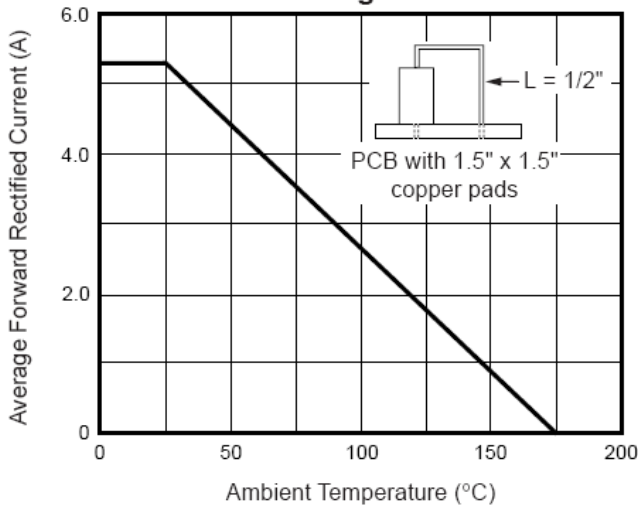


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

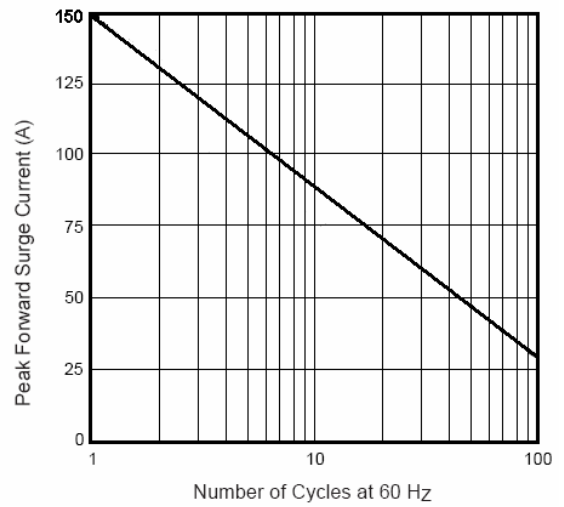


Fig. 3 – Typical Instantaneous Forward Characteristics

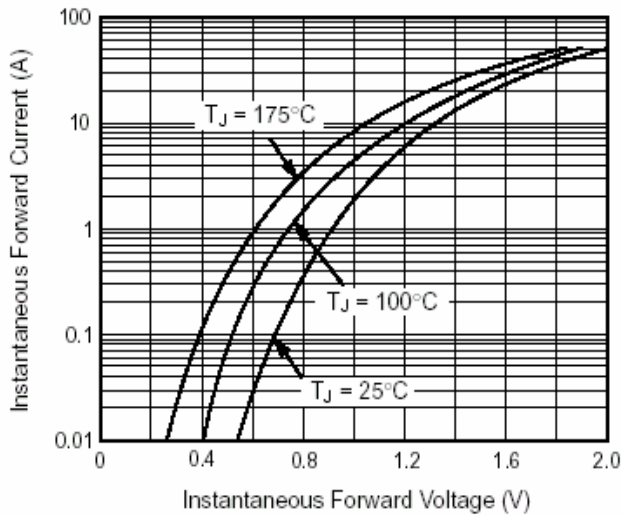


Fig. 4 – Typical Reverse Characteristics

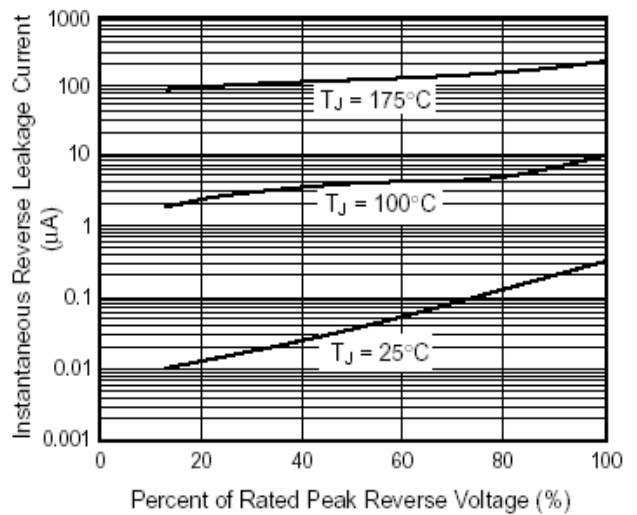


Fig. 5 – Typical Junction Capacitance per Leg

