

# RU4AM

## GLASS PASSIVATED FAST RECOVERY RECTIFIER

VOLTAGE: 800V

CURRENT: 3.0A




### FEATURE

High temperature metallurgically bonded construction  
Sintered glass cavity free junction  
Capability of meeting environmental standard of MIL-S-19500  
High temperature soldering guaranteed  
350°C /10sec/0.375"lead length at 5 lbs tension  
Operate at Ta =55°C with no thermal run away  
Typical Ir<0.2μA  
Low power loss, high efficient

### MECHANICAL DATA

Terminal: Plated axial leads solderable per MIL-STD 202E, method 208C  
Case: Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy  
Polarity: Color band denotes cathode  
Mounting position: any

### DO-201AD

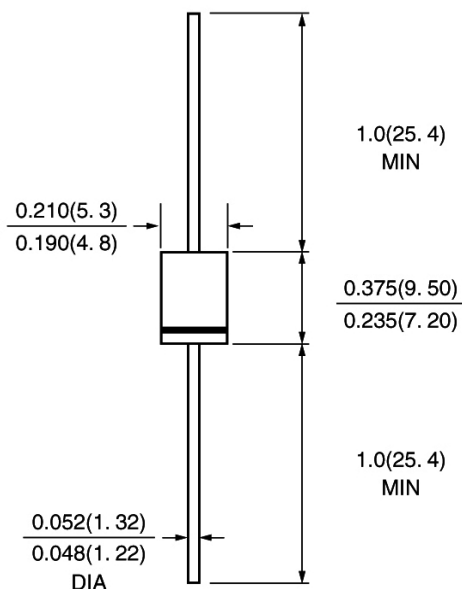

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	RU4AM	units
Maximum Recurrent Peak Reverse Voltage	Vrrm	800	V
Maximum RMS Voltage	Vrms	560	V
Maximum DC blocking Voltage	Vdc	800	V
Maximum Average Forward Rectified Current 3/8"lead length at Ta =35°C	If(av)	3.0	A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	Ifsm	80	A
Maximum Forward Voltage at IF=3.5A and 25°C	Vf	1.2	V
Maximum full load reverse current full cycle average at 55°C Ambient	Ir(av)	100	μA
Maximum DC Reverse Current at rated DC blocking voltage Ta =25°C	Ir	5.0	μA
Maximum DC Reverse Current at rated DC blocking voltage Ta =125°C	Ir	100	μA
Maximum Reverse Recovery Time (Note 1)	Trr	120	nS
Typical Junction Capacitance (Note 2)	Cj	15	pF
Typical Thermal Resistance (Note 3)	Rth(ja)	50	°C /W
Storage and Operating Temperature Range	Tstg, Tj	-55 to +150	°C

Note:

1. Reverse Recovery Condition If =0.5A, Ir =1.0A, Irr =0.25A
2. Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
3. Thermal Resistance from Junction to Ambient at 3/8"lead length, P.C. Board Mounted

RATINGS AND CHARACTERISTIC CURVES RU4AM

Fig. 1 – Forward Current Derating Curve

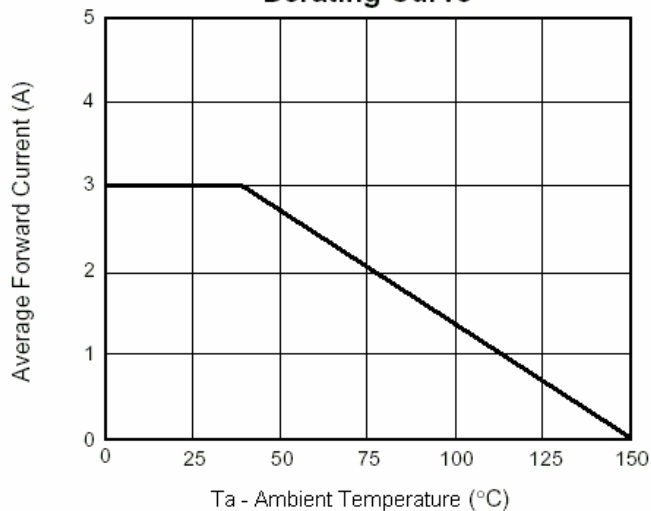


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

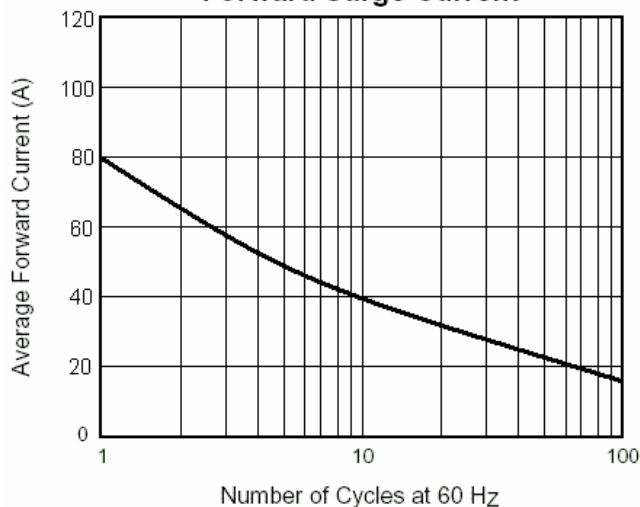


Fig. 3 – Typical Instantaneous Forward Characteristics

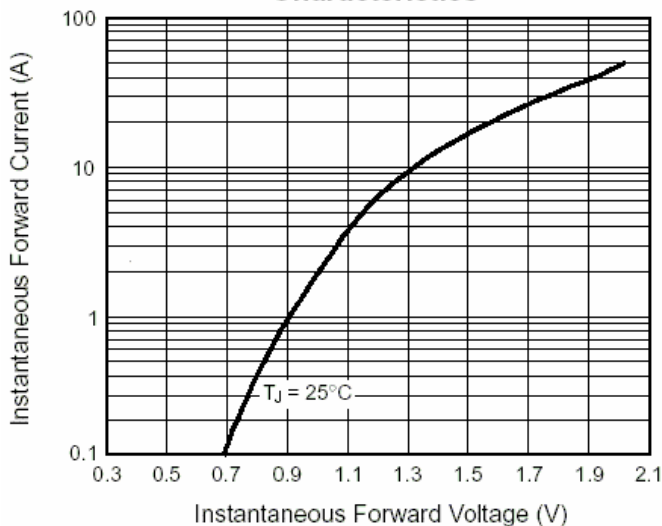


Fig. 4 – Typical Reverse Characteristics

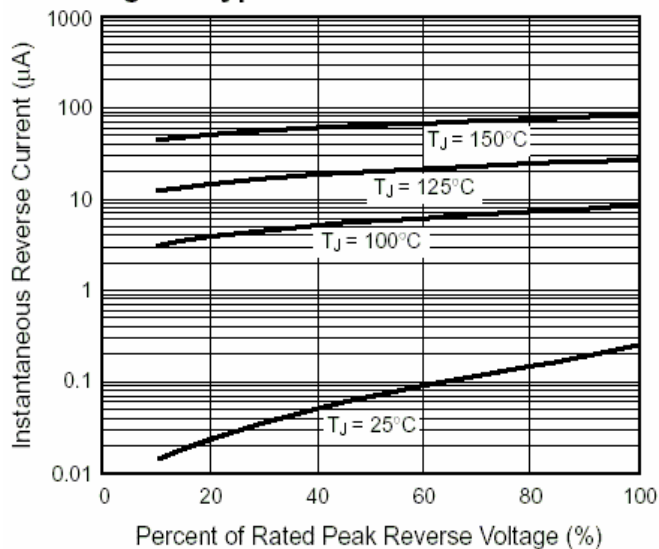


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

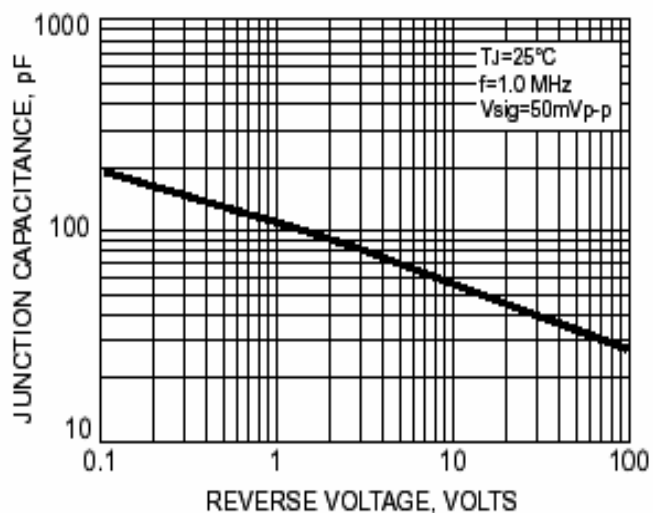


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

