

## RU4C

### GLASS PASSIVATED FAST SWITCHING PLASTIC RECTIFIER

VOLTAGE: 1050V

CURRENT: 3.0A




#### FEATURE

High temperature metallurgically bonded construction  
Sintered glass cavity free junction  
Capability of meeting environmental standard of MIL-S-19500  
High temperature soldering guaranteed  
350°C /10sec/0.375"lead length at 5 lbs tension  
Operate at Ta =55°C with no thermal run away  
Typical Ir<0.2μA  
Low power loss, high efficient

#### MECHANICAL DATA

Terminal: Plated axial leads solderable per MIL-STD 202E, method 208C  
Case: Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy  
Polarity: Color band denotes cathode  
Mounting position: any

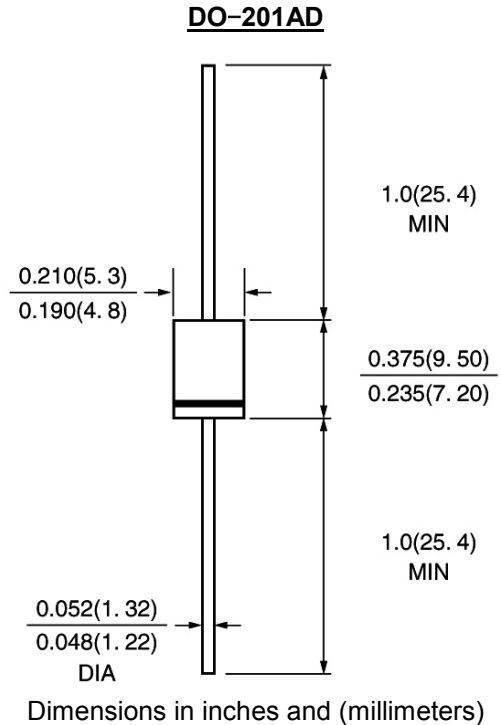

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	RU4C	units
Maximum Recurrent Peak Reverse Voltage	V <sub>rrm</sub>	1050	V
Maximum RMS Voltage	V <sub>rms</sub>	735	V
Maximum DC blocking Voltage	V <sub>dc</sub>	1050	V
Maximum Average Forward Rectified Current 3/8"lead length at Ta =35°C	I <sub>f(av)</sub>	3.0	A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I <sub>fsm</sub>	80	A
Maximum Forward Voltage at rated Forward Current and 25°C	V <sub>f</sub>	1.3	V
Maximum full load reverse current full cycle average at 55°C Ambient	I <sub>r(av)</sub>	100	μA
Maximum DC Reverse Current at rated DC blocking voltage Ta =25°C	I <sub>r</sub>	5.0	μA
Maximum DC Reverse Current at rated DC blocking voltage Ta =125°C	I <sub>r</sub>	100	μA
Maximum Reverse Recovery Time (Note 1)	T <sub>rr</sub>	120	nS
Typical Junction Capacitance (Note 2)	C <sub>j</sub>	15	pF
Typical Thermal Resistance (Note 3)	R <sub>th(ja)</sub>	50	°C/W
Storage and Operating Temperature Range	T <sub>stg</sub> , T <sub>j</sub>	-55 to +150	°C

Note:

- Reverse Recovery Condition I<sub>f</sub> =0.5A, I<sub>r</sub> =1.0A, I<sub>rr</sub> =0.25A
- Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
- Thermal Resistance from Junction to Ambient at 3/8"lead length, P.C. Board Mounted

## RATINGS AND CHARACTERISTIC CURVES RU4C

