

SB1020 THRU SB1060

SCHOTTKY BARRIER RECTIFIER

VOLTAGE: 20 TO 60V

CURRENT: 10.0A




FEATURE

High current capability, Low forward voltage drop
Low power loss, high efficiency
High surge capability

MECHANICAL DATA

Terminal: Plated axial leads solderable per MIL-STD 202E, method 208C
Case: Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy
Polarity: AS MARKED
Mounting position: any

TO-220AC

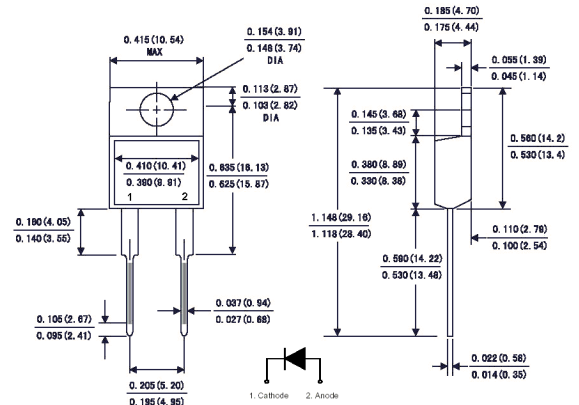

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	SB 1020	SB 1030	SB 1040	SB 1050	SB 1060	units
Maximum Recurrent Peak Reverse Voltage	V _{rrm}	20	30	40	50	60	V
Maximum RMS Voltage	V _{rms}	14	21	28	35	42	V
Maximum DC blocking Voltage	V _{dc}	20	30	40	50	60	V
Maximum Average Forward Rectified Current (See Fig 1)	I _{f(av)}	10.0					A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I _{fsm}	150.0					A
Maximum Forward Voltage at 10.0A DC	V _f	0.65			0.80		V
Maximum DC Reverse Current at rated DC blocking voltage Ta =25°C Ta =125°C (Note 1)	I _r	1.0			30.0		mA mA
Typical Thermal Resistance (Note 2)	R(jc)	2.5					°C/W
Storage and Operating Junction Temperature	T _{stg} ,T _j	-65 to +125			-65 to +150		°C

Note:

1. Pules Test: 300Us Pulse Wiath ,1%Duty Cycle
2. Thermal Resistance From Junction To Case

FIG.1-FORWARD CURRENT DERATING CURVE

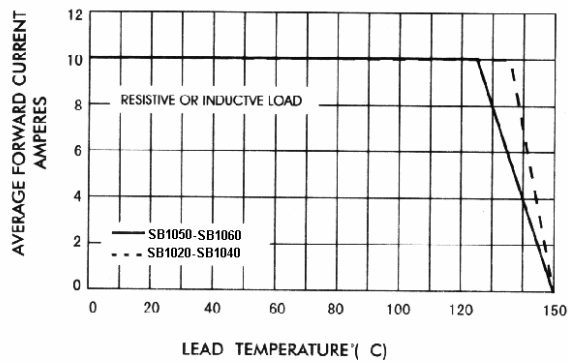


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

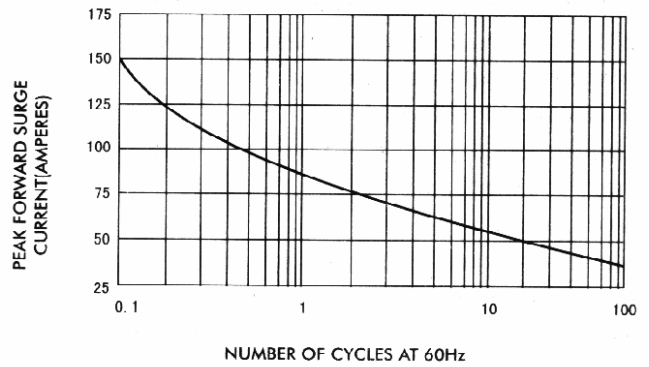


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

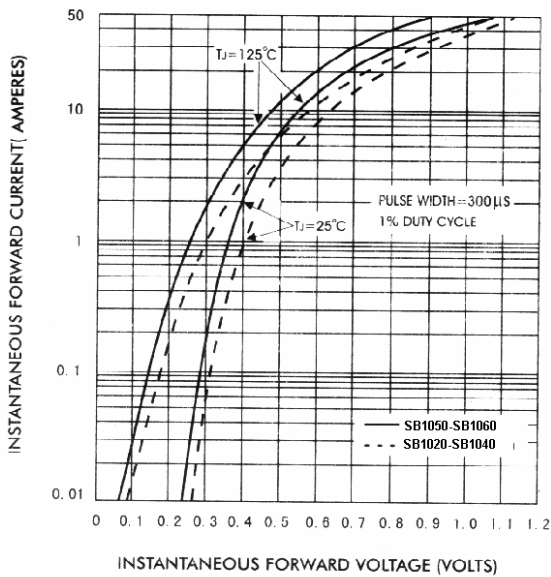


FIG.4-TYPICAL REVERSE CHARACTERISTICS

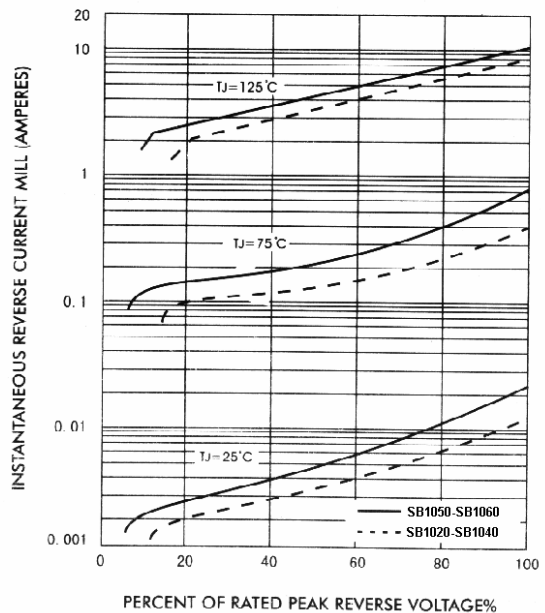


FIG.5-TYPICAL JUNCTION CAPACITANCE

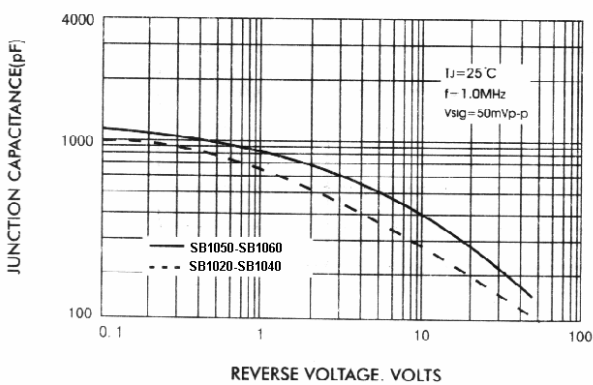


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCES

