

# SB180 THRU SB1100

## SCHOTTKY BARRIER RECTIFIER

VOLTAGE: 80 TO 100V

CURRENT: 1.0A




### FEATURE

High current capability, Low forward voltage drop  
Low power loss, high efficiency  
High surge capability  
High temperature soldering guaranteed  
250°C /10sec/0.375" lead length at 5 lbs tension

### MECHANICAL DATA

Terminal: Plated axial leads solderable per  
MIL-STD 202E, method 208C  
Case: Molded with UL-94 Class V-0 recognized Flame  
Retardant Epoxy  
Polarity: color band denotes cathode  
Mounting position: any

### DO-41\DO-204AL

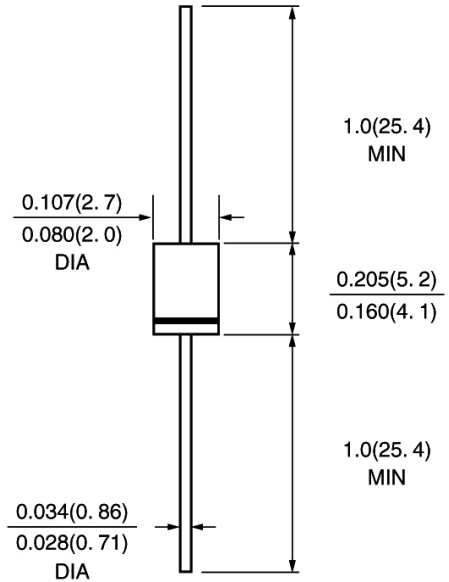

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	SB 180	SB 190	SB 1100	units
Maximum Recurrent Peak Reverse Voltage	V <sub>rrm</sub>	80	90	100	V
Maximum RMS Voltage	V <sub>rms</sub>	56	63	70	V
Maximum DC blocking Voltage	V <sub>dc</sub>	80	90	100	V
Maximum Average Forward Rectified Current 3/8" lead length	I <sub>f(av)</sub>	1.0			A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I <sub>fsm</sub>	40.0			A
Maximum Forward Voltage at 1.0A DC	V <sub>f</sub>	0.84			V
Maximum DC Reverse Current at rated DC blocking voltage	I <sub>r</sub>	500 10.0			<u>μA</u> mA
Typical Junction Capacitance (Note 1)	C <sub>j</sub>	110.0			pF
Typical Thermal Resistance (Note 2)	R(jc)	50.0			°C /W
Storage and Operating Junction Temperature	T <sub>j</sub>	-55 to +125			°C
Storage Temperature	T <sub>stg</sub>	-55 to +150			°C

Note:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
2. Thermal Resistance from Junction to Ambient at 0.5" lead length, vertical P.C. Board Mounted <sup>1</sup>

Fig. 1 – Forward Current Derating Curve

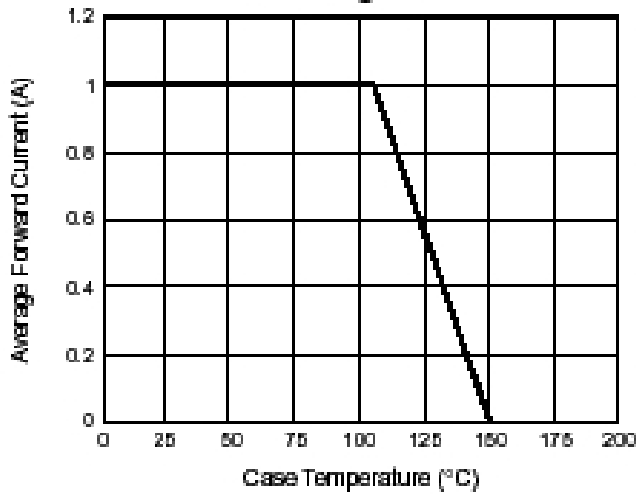


Fig. 2 – Typical Instantaneous Forward Characteristics

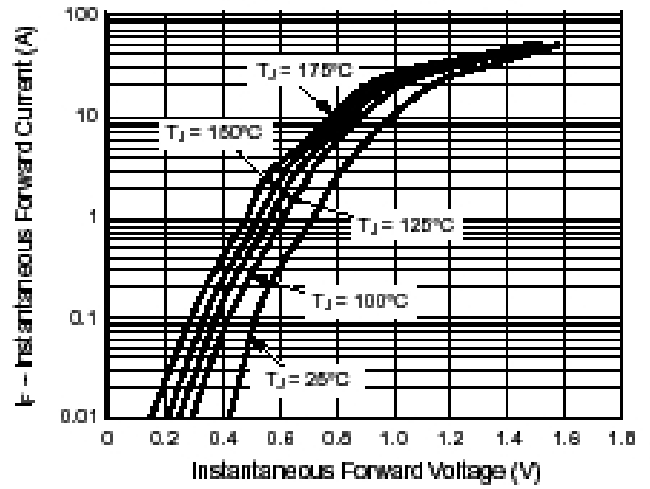


Fig. 3 – Typical Reverse Characteristics per Leg

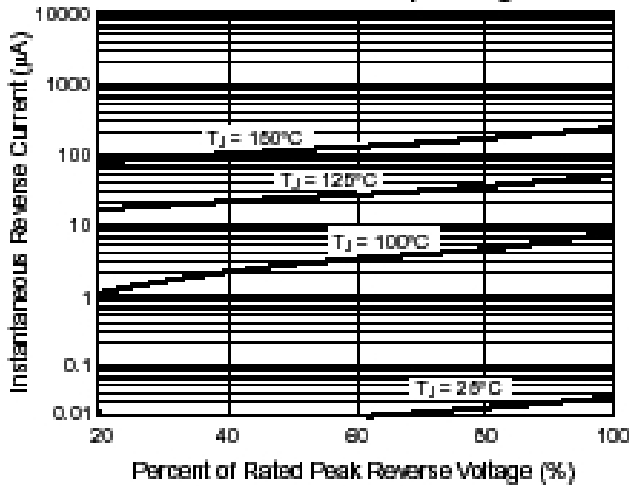


Fig. 4 – Typical Junction Capacitance

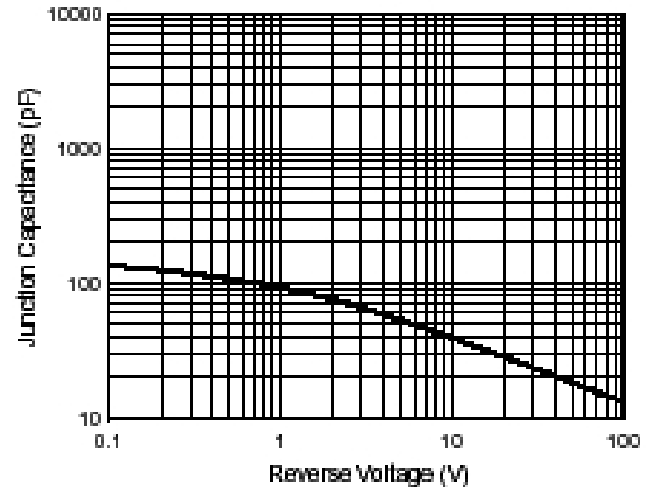


Fig. 5 – Typical Transient Thermal Impedance

