

SB260A-41C

SCHOTTKY BARRIER RECTIFIER

VOLTAGE: 60V

CURRENT: 2.0A




FEATURE

High current capability, Low forward voltage drop
Low power loss, high efficiency
High surge capability
High temperature soldering guaranteed
250°C /10sec/0.375" lead length at 5 lbs tension

MECHANICAL DATA

Terminal: Plated axial leads solderable per MIL-STD 202E, method 208C
Case: Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy
Polarity: color band denotes cathode
Mounting position: any

DO-41\DO-204AL

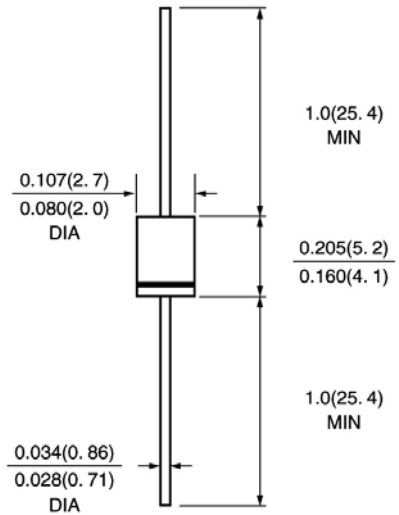

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	SB260A-41C	units
Maximum Recurrent Peak Reverse Voltage	Vrrm	60	V
Maximum RMS Voltage	Vrms	42	V
Maximum DC blocking Voltage	Vdc	60	V
Maximum Average Forward Rectified Current 0.375" lead length	If(av)	2.0@ TL=75°C 0.5@ Tc=120°C	A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	Ifsm	50	A
Inrush Current with 10 Ω and 20uF foil capacitor placed in series to the DUT 10000 times, 10s between each pulse Tc=120°C	Ifsm-1	50min	A
Maximum Forward Voltage at 2.0A DC (Note 1)	Vf	0.7	V
Maximum DC Reverse Current at rated DC blocking voltage Tc =25°C Tc =100°C Tc =120°C	Ir	0.5 3.0 8.0	mA
Total power dissipatio (Note2)	Ptot	1400	mW
Maximum Reverse Recovery Time(Note 3) Tc =25°C Tc =120°C	Trr	7 9	nS
Typical Thermal Resistance (Note 4) (Note 5)	Rth(ja) Rth(jc)	50 30	°C /W
Storage and Operating Junction Temperature	Tstg, Tj	-55 to +150	°C

Note:

1. Pulse test : 300uS pulse width ,1% duty cycle.
2. Tc=25°C(according to calculations)
3. Reverse Recovery Condition If =0.5A, Ir =1.0A, Irr =0.25A
4. Thermal Resistance from Junction to Ambient at 0.5" lead length, vertical P.C. Board Mounted
5. Thermal Resistance from Junction to Case

Rev.A1, 11-May-09

<https://www.voltaristech.com/>

RATINGS AND CHARACTERISTIC CURVES SB260A-41C

Fig. 1 - Forward Current Derating Curve

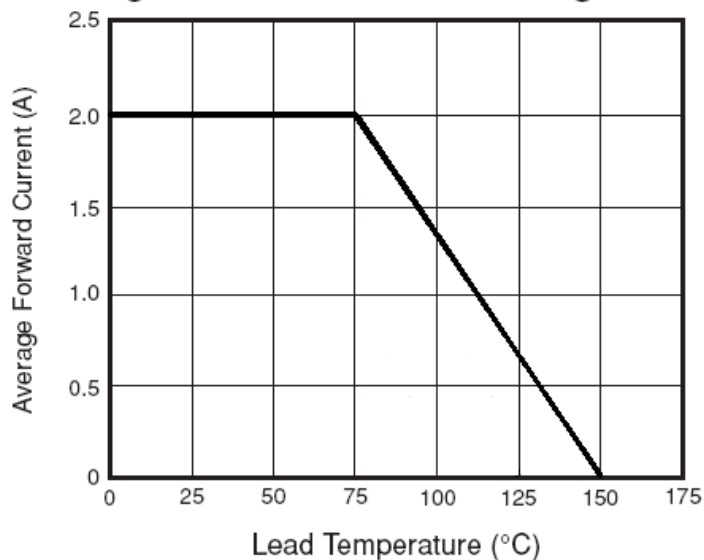


Fig. 2 - Maximum Non-repetitive Surge Current

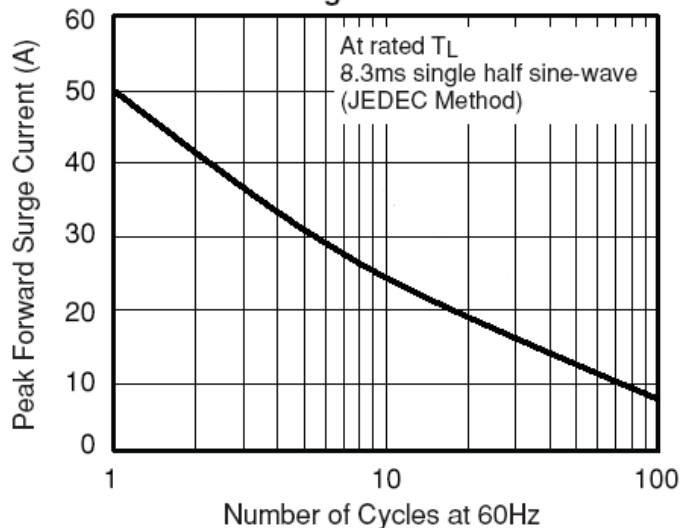


Fig. 3 - Typical Instantaneous Forward Characteristics

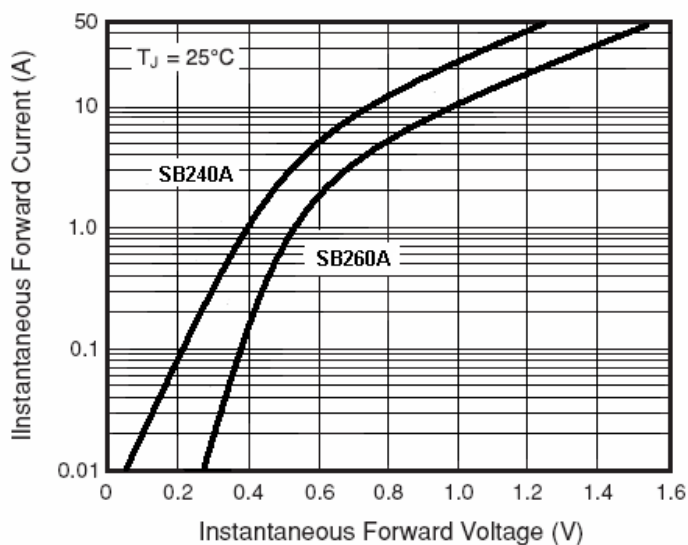


Fig. 4 - Typical Reverse Characteristics


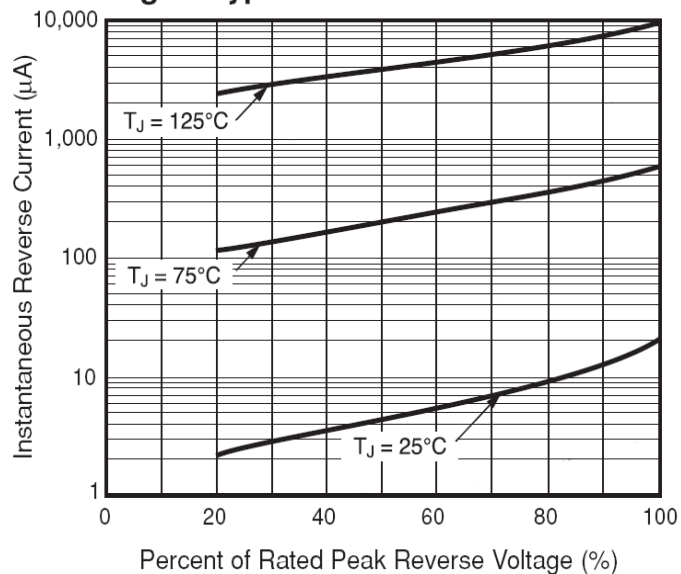


Fig. 5 - Typical Junction Capacitance

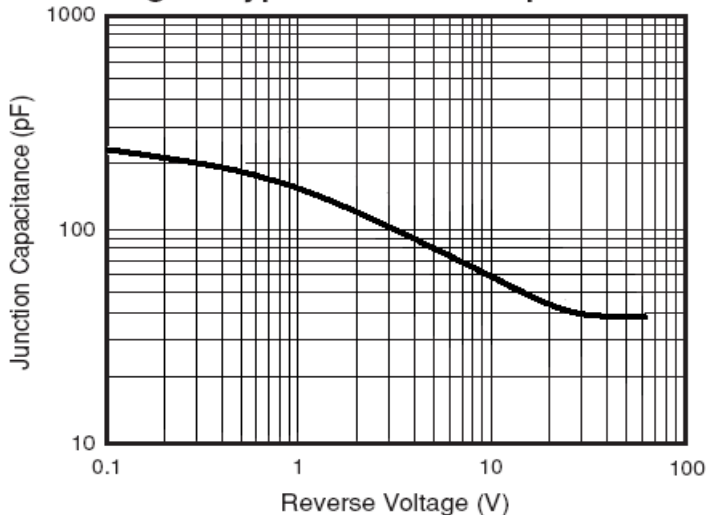

ESD CAPABILITY

1. According to 1.4601.442-01 test circuit, ESD Test of SB260A at 60 Vdc passed with the immunity capability of $\pm 15\text{KV}$
2. Description of test method & conditions

Setup:

Test voltages for DUT: max specified DC blocking voltage.

ESD test level for Contact discharge:

10 Impulses at each test level and output polarity.


Test level: $\pm 2, \pm 4, \pm 6, \pm 8, \pm 10, \pm 12, \pm 15\text{KV}$

Test criteria: No faults are allowed.

Ambient temperature: 25°C Relative humidity : 55%

Specification: ESD Generator according to IEC 61000-4-2

Test circuit:

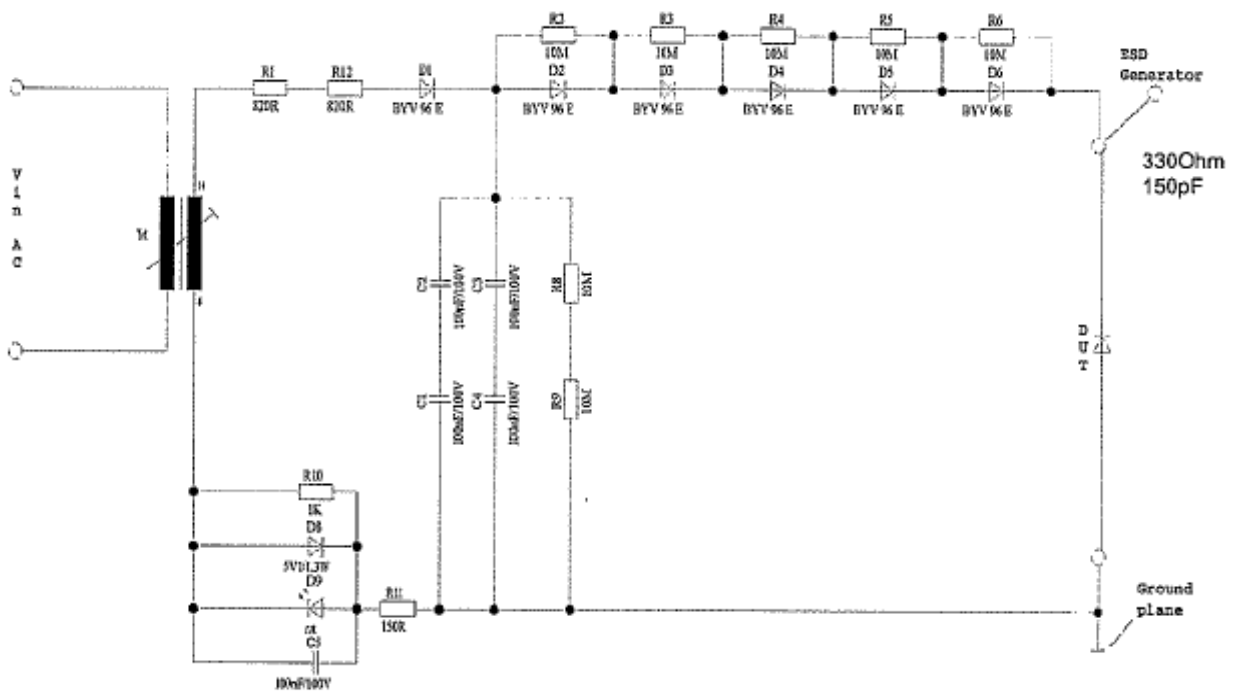

(1.4601.442-01)