

UG2KB80-E-47L

SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIER

Voltage: 800V

Current: 2.0A




Features

Glass passivated chip junction
 High case dielectric strength
 High surge current capability
 Ideal for printed circuit board
 This series is UL listed under Recognized Component Index, file number E330278
 Halogen Free

Mechanical Data

Terminal: Plated leads solderable per J-STD-002
 Case: UL-94 Class V-0 recognized Halogen Free Epoxy
 Polarity: Polarity symbol marked on body
 Mounting position: any

D3K

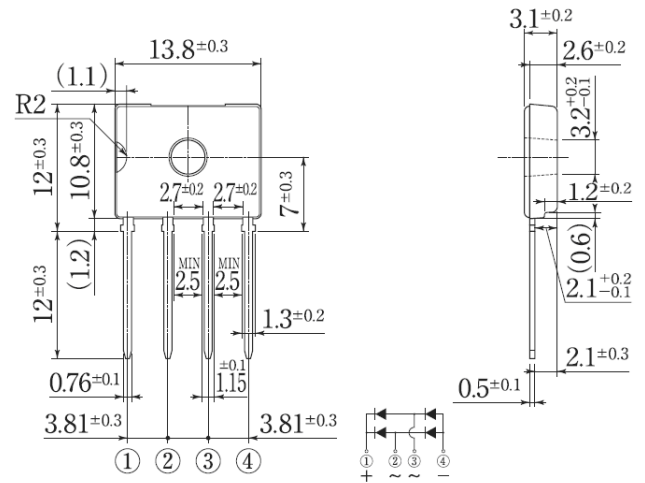

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	Symbol	UG2KB80-E-47L	units
Maximum repetitive peak reverse voltage	V _{rrm}	800	V
Maximum RMS voltage	V _{rms}	560	V
Maximum DC blocking voltage	V _{dc}	800	V
Maximum average forward rectified output current T _c 143°C with heatsink	I _{f(av)}	2.0	A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	I _{fsm}	75	A
Maximum instantaneous forward voltage drop per leg at 1.0A	V _f	1.05	V
Rating for fusing (3ms ≤ t < 8.3ms)	I ² t	24	A ² Sec
Maximum DC reverse current at rated DC blocking voltage per leg	I _r	10 500	μA
Thermal resistance	without heatsink	R _{th(ja)}	55
	with heatsink	R _{th(jc)}	1.5
	without heatsink	R _{th(jl)}	15
Operating junction temperature range	T _j	-55 to +150	°C
Storage temperature range	T _{stg}	-60 to +150	°C

Note:

RATINGS AND CHARACTERISTIC CURVES UG2KB80-E-47L

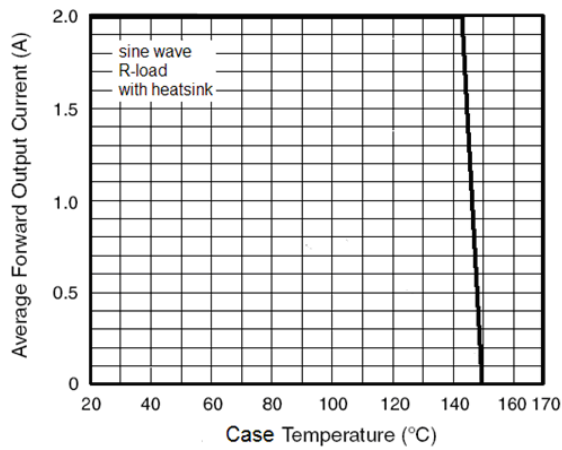


Figure 1. Derating Curve Output Rectified Current

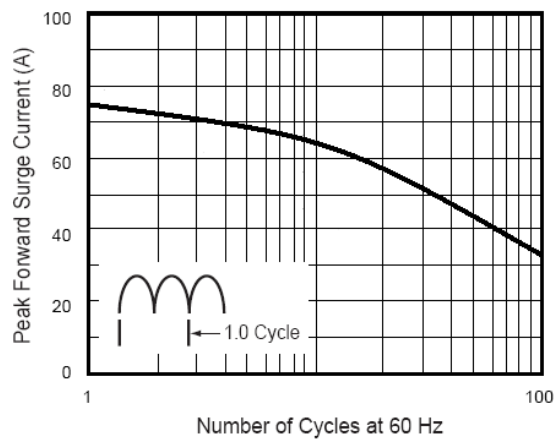


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current Per Leg

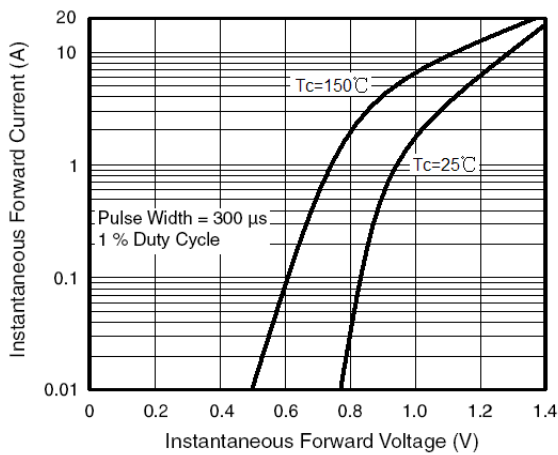


Figure 3. Typical Forward Characteristics Per Diode

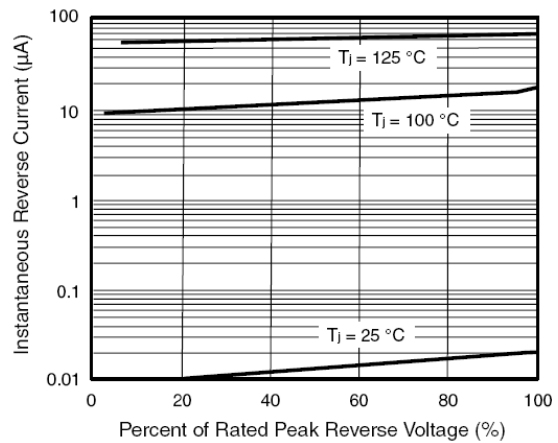


Figure 4. Typical Reverse Leakage Characteristics Per Diode

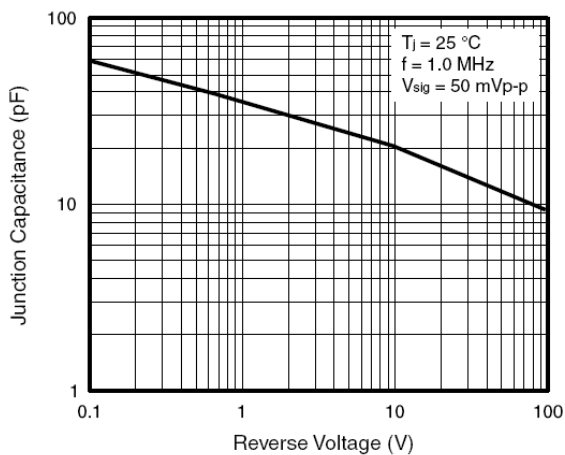


Figure 5. Typical Junction Capacitance Per Diode