

UGPP10D THRU UGPP10J

ULTRAFAST EFFICIENT PLASTIC SILICON RECTIFIER

VOLTAGE : 200 TO 600V

CURRENT : 1.0A




FEATURE

Low power loss
High surge capability
Glass passivated chip junction
Ultra-fast recovery time for high efficiency
High temperature soldering guaranteed
250 /10sec/0.375 lead length at 5 lbs tension

MECHANICAL DATA

Terminal : Plated axial leads solderable per MIL-STD 202E, method 208C
Case : Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy
Polarity : color band denotes cathode
Mounting position : any

DO -41\DO-204AL

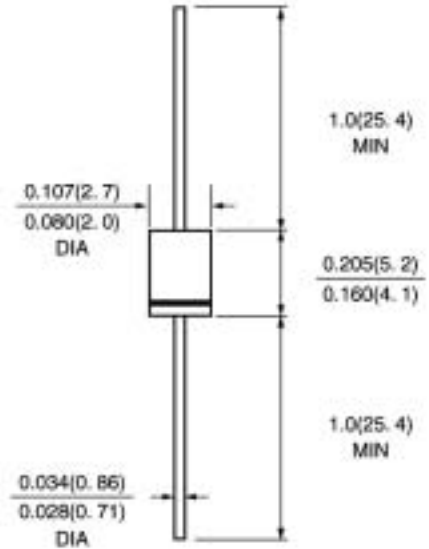

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60HZ, resistive or inductive load rating at 25 °C, unless otherwise stated)

	SYMBOL	UGPP10D	UGPP10G	UGPP10J	units
Maximum Recurrent Peak Reverse Voltage	V _{rrm}	200	400	600	V
Maximum RMS Voltage	V _{rms}	140	280	420	V
Maximum DC blocking Voltage	V _{dc}	200	400	600	V
Maximum Average Forward Rectified Current 3/8 lead length at T _a =55	I _{f(av)}	1.0			A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I _{fsm}	30.0			A
Maximum Forward Voltage at Forward current 1A Peak	V _f	1.0	1.0	1.8	V
Maximum DC Reverse Current T _a =25 at rated DC blocking voltage T _a =125	I _r	10.0 100.0			μA μA
Maximum Reverse Recovery Time (Note 1)	T _{rr}	35			nS
Typical Junction Capacitance (Note 2)	C _j	17.0			pF
Typical Thermal Resistance (Note 3)	R(ja)	50.0			/W
Storage and Operating Junction Temperature	T _{stg,Tj}	-55 to +150			

Note :

- Reverse Recovery Condition I_f =0.5A, I_r =1.0A, I_{rr} =0.25A
- Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
- Thermal Resistance from Junction to Ambient at 3/8 lead length, P.C. Board Mounted

RATINGS AND CHARACTERISTIC CURVES UGPP10D THRU UGPP10J

