

# G10XB05-47L THRU G10XB100-47L

## SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIER

Voltage: 50 to 1000V

Current: 10.0A




### Features

Glass passivated chip junction  
Ideal for printed circuit board  
High surge current capability  
High case dielectric strength

### Mechanical Data

Terminal: Solder plated, solderable per J-STD-002  
Case: UL-94 Class V-0 recognized Flame Retardant Epoxy  
Polarity: Polarity symbol marked on body  
Mounting position: any

### GSIB-3S

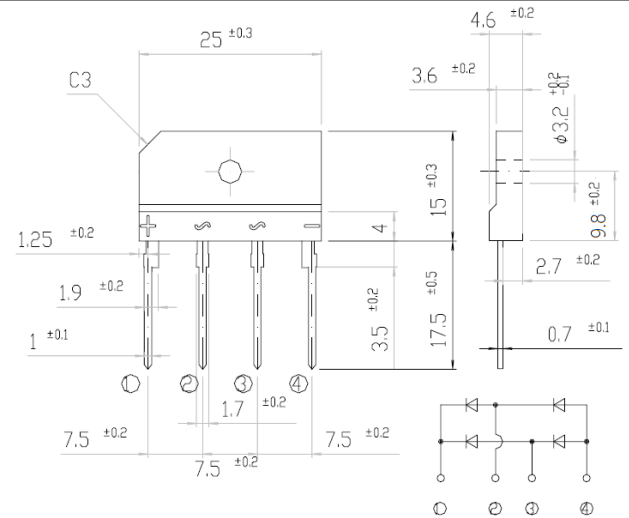

Dimensions in millimeters

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	Symbol	G10X B05- 47L	G10X B10- 47L	G10X B20- 47L	G10X B40- 47L	G10X B60- 47L	G10X B80- 47L	G10X B100- 47L	units
Maximum repetitive peak reverse voltage	V <sub>rrm</sub>	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V <sub>rms</sub>	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V <sub>dc</sub>	50	100	200	400	600	800	1000	V
Maximum average forward Rectified output current at T <sub>c</sub> = 100°C (Note 1) Ta = 25°C (Note 2)	I <sub>f(av)</sub>	10.0 2.7							A
Peak forward surge current 10ms single sine-wave superimposed on rated load	I <sub>fsm</sub>	120							A
Maximum instantaneous forward voltage drop per leg at 5.0A	V <sub>f</sub>	1.1							V
Rating for fusing (t < 10.0ms)	I <sup>2</sup> t	60							A <sup>2</sup> Sec
Maximum DC reverse current at rated DC blocking voltage per leg Ta = 25°C Ta = 125°C	I <sub>r</sub>	10.0 250							μA
Maximum thermal resistance per leg (Note2) (Note1)	R <sub>th(ja)</sub> R <sub>th(jc)</sub>	26.0 2.3							°C/W
Operating junction and storage temperature range	T <sub>j</sub> , T <sub>stg</sub>	-55 to +150							°C

Note:

1. junction to case, with heatsink
2. junction to ambient, without heatsink
3. Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw

RATINGS AND CHARACTERISTIC CURVES G10XB05-47L THRU G10XB100-47L

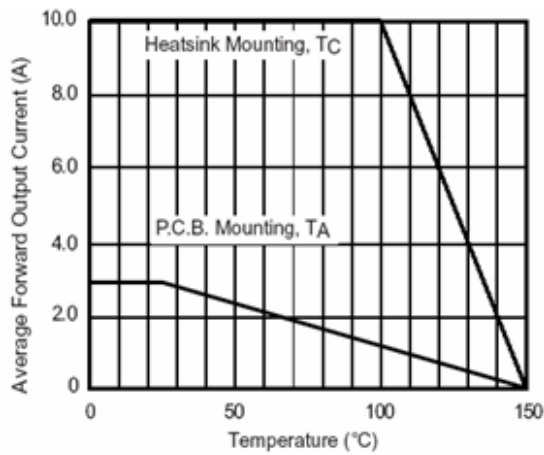


Figure 1. Derating Curve Output Rectified Current

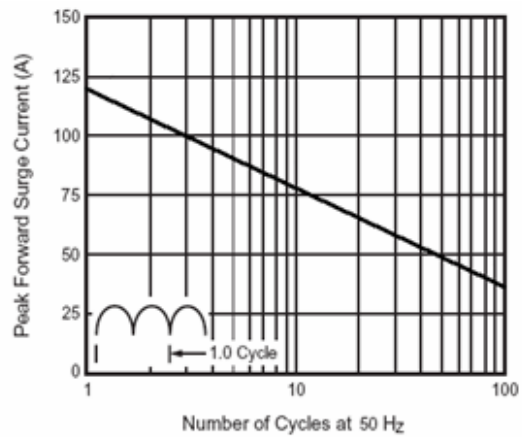


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

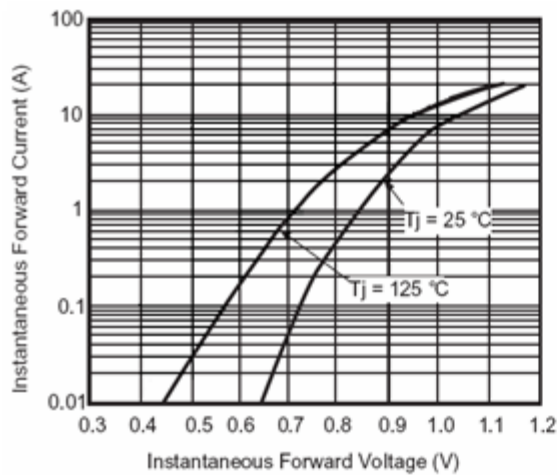


Figure 3. Typical Forward Characteristics Per Leg

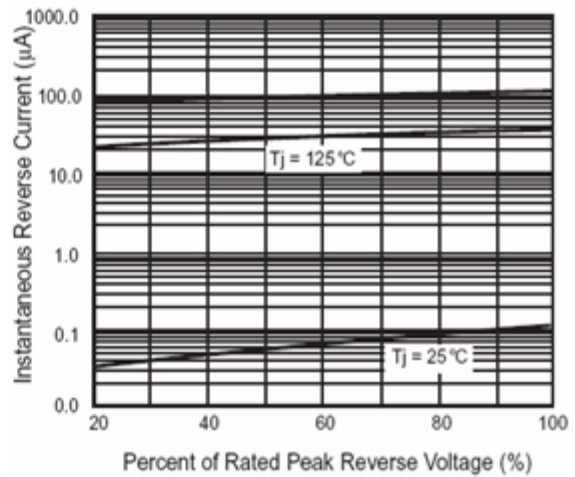


Figure 4. Typical Reverse Characteristics Per Leg

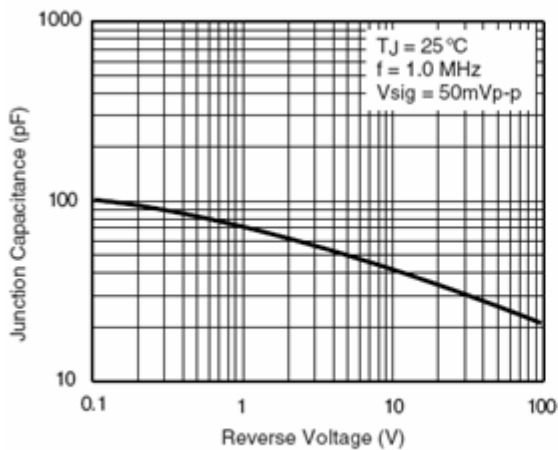


Figure 5. Typical Junction Capacitance Per Leg


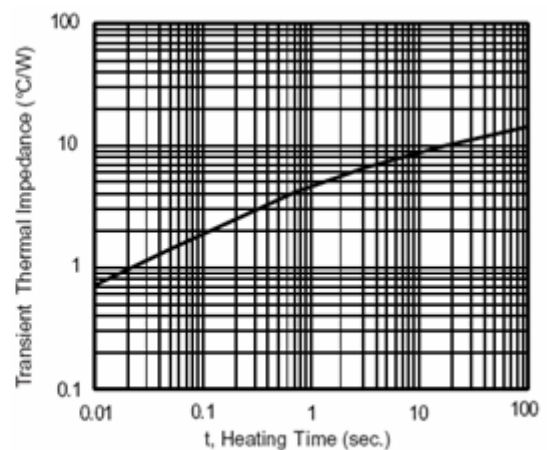


Figure 6. Typical Transient Thermal Impedance

---

RATINGS AND CHARACTERISTIC CURVES G10XB05-47L THRU G10XB100-47L

---

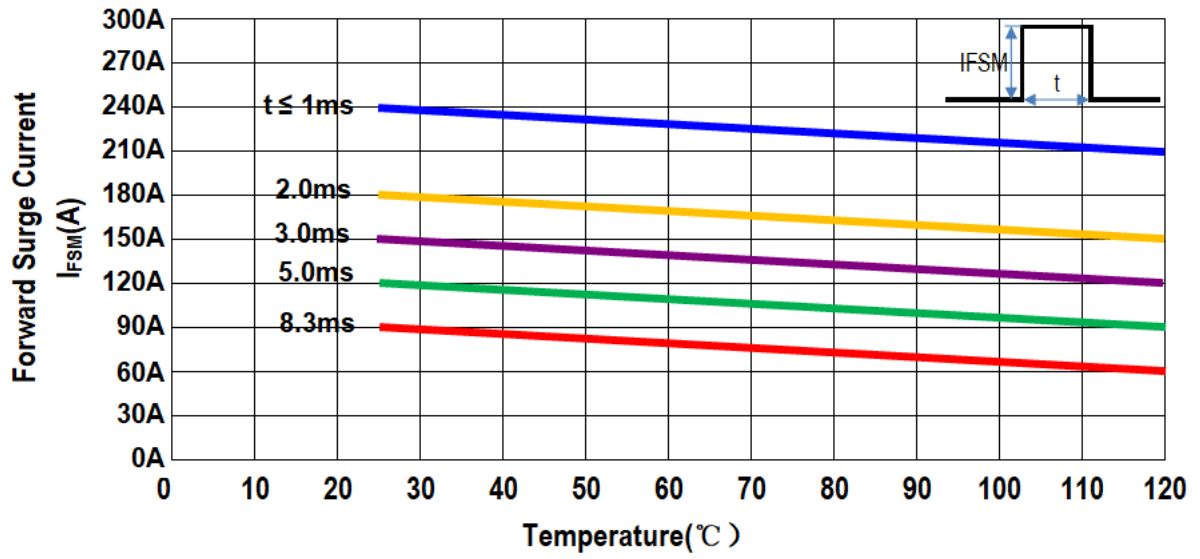

Maximum Peak Forward Surge Current